



EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

05.07.2023 Bulletin 2023/27

(21) Application number: **19172073.9**

(22) Date of filing: **30.04.2019**

(51) International Patent Classification (IPC):

B01D 63/02 (2006.01)	B01D 65/08 (2006.01)
B01D 67/00 (2006.01)	B01D 69/02 (2006.01)
B01D 69/08 (2006.01)	B01D 69/14 (2006.01)
B01D 71/68 (2006.01)	C02F 1/44 (2023.01)
A47G 21/18 (2006.01)	C02F 1/00 (2023.01)
B01D 71/44 (2006.01)	B01D 71/52 (2006.01)
C02F 1/50 (2023.01)	B01D 71/02 (2006.01)

(52) Cooperative Patent Classification (CPC):

B01D 63/021; B01D 63/024; B01D 65/08; B01D 67/0011; B01D 67/0079; B01D 69/02; B01D 69/08; B01D 69/087; B01D 69/148; B01D 71/024; C02F 1/444; A47G 21/188; B01D 71/022; B01D 71/44; B01D 71/52; (Cont.)

(54) **HOLLOW FIBER MEMBRANE FOR FILTRATION OF LIQUIDS**

HOHLFASERMEMBRAN ZUR FILTRATION VON FLÜSSIGKEITEN

MEMBRANE À FIBRES CREUSES POUR LA FILTRATION DE LIQUIDES

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **03.05.2018 PK 3192018 P**
01.10.2018 GB 201816030

(43) Date of publication of application:
06.11.2019 Bulletin 2019/45

(73) Proprietor: **Pak Vitae (Private) Limited**
Lahore (PK)

(72) Inventors:

- **SOHAIL, Shayan**
Lahore (PK)
- **AHMED, Arslan**
Lahore (PK)
- **TANVEER, Hafiz Usama**
Lahore (PK)

(74) Representative: **HGF**
HGF Limited
1 City Walk
Leeds LS11 9DX (GB)

(56) References cited:

EP-A1- 2 160 945	EP-A1- 2 160 946
EP-A1- 3 259 049	EP-A2- 2 682 177
WO-A2-2008/067817	CN-A- 102 205 209
CN-A- 106 310 980	JP-A- H04 260 423
JP-A- H05 115 760	JP-A- H11 221 451
JP-A- 2011 092 800	JP-A- 2016 517 797
KR-A- 20040 074 362	US-A- 5 102 547

- **STEFAN BALTA ET AL: "A new outlook on membrane enhancement with nanoparticles: The alternative of ZnO", JOURNAL OF MEMBRANE SCIENCE, ELSEVIER BV, NL, vol. 389, 21 October 2011 (2011-10-21), pages 155-161, XP028394213, ISSN: 0376-7388, DOI: 10.1016/J.MEMSCI.2011.10.025 [retrieved on 2011-10-25]**
- **JESÚS MARÍA ARSUAGA ET AL: "Influence of the type, size, and distribution of metal oxide particles on the properties of nanocomposite ultrafiltration membranes", JOURNAL OF MEMBRANE SCIENCE, vol. 428, 17 November 2012 (2012-11-17), pages 131-141, XP055615127, NL ISSN: 0376-7388, DOI: 10.1016/j.memsci.2012.11.008**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

(52) Cooperative Patent Classification (CPC): (Cont.)
B01D 71/68; B01D 2323/12; B01D 2323/18;
B01D 2323/21; B01D 2323/40; B01D 2325/36;
B01D 2325/38; B01D 2325/48; C02F 1/505;
C02F 2303/04

Description

FIELD OF INVENTION:

[0001] The present invention is in the field of hollow fiber membrane modules having intrinsic anti-microbial properties with an outside-in liquid flow configuration. The membrane can find utility in portable water filtration devices through the multipurpose housing that works directly under suction pressure or passage pressure or gravitational head of liquid.

BACKGROUND OF INVENTION:

[0002] Pure drinking water has always been a big issue for people all around the globe. 663 million people rely on unimproved water sources, including 160 million people depending on surface water. Globally, at least 2.1 billion people use a drinking-water source contaminated with feces. Contaminated water can transmit diseases such as diarrhea, cholera, dysentery, typhoid, and polio. Some 842,000 people are estimated to die each year from diarrhea because of unsafe drinking water, sanitation and hand hygiene. Diarrhea is largely preventable, and the deaths of 361,000 children aged under 5 each year could be avoided each year if these risk factors were addressed. Almost 240 million people are affected by schistosomiasis an acute and chronic disease caused by parasitic worms contracted through exposure to infested water as per WHO reports.

[0003] In Pakistan, 44% of the population has complete inaccessibility to pure drinking water throughout their lives. In 2015, 311 children died only in Thar due to the scarcity of clean water. In Khyber Pakhtunkhwa (KPK) and the Federally Administered Tribal Areas (FATA), 40% of deaths occur due to water-borne diseases. Every minute, a child dies in Pakistan due to contaminated water. 1 million Diarrhea cases are reported every year in Pakistan. Pakistan is currently spending 1.3 billion dollars on waterborne disease elimination every year. Per WHO, 25-30% of Pakistanis admitted to hospitals are due to waterborne bacteria and 60% of total infant deaths are due to contaminated water.

[0004] Clean water is a big problem at household as well as individual level. For people on the move, clean drinking water has become an expensive resource. A requirement of a device that can filter any available water on-the-spot is the need of the time. On average, more than 70% of fresh available water is contaminated and hence not safe to drink. The current technologies used are either expensive, not portable, require power or are short-lived.

[0005] During natural or other disasters, emergency, or major incidents, the rescue departments or military use either disinfectant medicines, coagulant tablets, or if possible, they install a water filtration plant. The first two are inefficient and unreliable as they have known harmful effects on the human body, whereas the last one is expensive and clean water transportation is difficult as well.

[0006] The conventional water filtration membranes require power to pump water through the membrane. These membranes have undefined or larger pore sizes, which normally results in the escape of biological contamination into the purified water side of the membrane. Hence, most of the conventional membrane-based water filtration solutions are either equipped with UV light, Ozonation or Chlorination units (disinfectants). The prior two require high energy whereas the last one has carcinogenic effects on humans.

[0007] Filters based on sand/granite/charcoal/adsorbents beds have low processing speed, are heavy in weight, have a low processing capacity, and low level of efficiency in removal of biological contamination (especially viruses). In order to provide filtered water on a mass scale, a large setup is required and a frequent change of adsorbent is required to maintain filtration speed. A post-processing unit is also required to remove biological contamination in this case.

[0008] The ceramic membranes now used in portable water filtrations units lack durability. They are prone to damage when they face an impact, are heavier in weight, and require high temperatures for manufacturing. It is also difficult to maintain a pore size in such membranes that can remove biological contamination efficiently. The sintering process used to produce such ceramics is not commercially well established to reduce pore size below 20 nm.

[0009] Hollow fiber membranes are widely employed in the domestic and industrial sector for the microfiltration and ultrafiltration applications. During the passage of water from one side of the membrane to the other, filtration process occurs by selectively allowing only the water molecules and those particles which are considerably smaller than the surface pore size of the membrane. Hence, the surface of the membranes specifically and the whole fiber thickness, in general, form a boundary which is separating the unfiltered water from the filtered water. Polyethylene, cellulose acetate, polysulfone, polyvinylidene fluoride, polycarbonate, polyacrylonitrile, etc. are used as materials for forming the fibers of the membranes. This method requires that the porous hollow fibers have high porosity and narrow pore size distribution to improve separation efficiency and separation accuracy. Moreover, it also required that the membranes possess a pore size that is most suitable for separation targets, and the characteristics of effectively excluding bacteria, suspension solids, and turbid components. Meanwhile, the fibers of the membranes shall have higher mechanical strength and high water flux such that they can sustain long-term use under conditions required for chemically cleaning polluted membranes and for high operational pressures. Since such conventional hollow fiber membranes made of these materials have been developed and used for the purpose of improving filtration performance, certain inadequacies have been identified.

For example, these conventional hollow fiber membranes provide only a low-level processing performance, need back-washing and may get contaminated with bacteria and other microorganisms.

[0010] Various failed attempts have been made for a solution to these problems, including suggestions to increase porosity. Thus, hollow fiber membranes that provide a wellbalanced water permeation performance with micro biocidal properties and with a long life have not yet been obtained.

[0011] Currently, the following three filtration techniques are used in the water filtration industry: 1) Ultrafiltration (UF) 2) Nano Filtration 3) Reverse Osmosis Filtration. Most commonly, for freshwater resources, UF membranes are in use. The currently available hollow fiber based portable liquid filtration membranes are based on UF technology and hence, cannot efficiently remove dissolved metals such as Arsenic, chromium, Iron, etc. In order to achieve the removal of these metals, a pore size below 2 nm is required.

[0012] On the other hand, whilst a method of increasing the pore diameter of a membrane is generally employed for improving the water permeation performance of a membrane, this increase in pore diameter generally causes a deterioration in the fractionation performance of the membrane and in the strength of the membrane.

[0013] Hollow fiber membrane modules are commonly used for microfiltration and ultra-filtration of water, such modules being used in various scales; from large commercial scale plants to portable water filters. One of the known hollow fiber module configurations for water filters is disclosed in US4,435,289, where porous hollow fibers are sealed using hardened resin located at both ends of the fibers which also act as support. Water enters the fibers from the openings at the supported ends into the inner volume and is filtered when it passes through the micro pores of the hollow fiber walls. This is an inside-out flow, where the clean water moves out from the lumen of the fibers and the filtrate accumulates on the inner side of the fibers.

[0014] Such fibers are cleaned by forwarding flushing water through the inner volume of the fibers, possibly combined with a backflush as disclosed in WO 2008/101172 by Vestergaard Frandsen.

[0015] This principle is also explained with a concept of personal drinking straws, such as in EP 22355 02B1. This device contains a mouthpiece used for suction of water through the straw containing a bundle of U-shaped hollow fibers with microporous membrane walls, which are supported with both ends sealed in a head just below the mouthpiece. When the human mouth creates the suction, the flow is from outside to inside. The filtrate remains outside the membrane walls, and clean water enters the inner volume of the fibers through microporous walls. This clean water is then released from the sealed ends near the mouthpiece for drinking purpose.

[0016] This device disclosed in EP 2235502B1 faces a general problem encountered with such filters; that is, the hollow fibers are made of a hydrophilic material able to transport water efficiently through the membranes and to which a non-slippery water layer is formed on the membranes. Due to this phenomenon, the air cannot, or only hardly can, travel across the membrane walls when these membranes are wet (i.e. when they are being used to filter water). This results in a risk of air trapping in the volume around the fibers, which decreases the water flow, as the trapped air prevents an efficient water flow through the membranes. Due to this, a higher suction pressure is required by a human to obtain an optimum flow from the modules.

[0017] This problem is very common in such filtration devices and solutions to this problem have been proposed earlier, as disclosed in the above-mentioned US 4,636,307 several hydrophobic fibers are added in the module to repel water that forms a non-slippery layer around the fibers and prevent the air passage. However, with respect to production, this solution is complicated and expensive.

[0018] Another configuration instead of using a U-shaped hollow fiber membrane module, uses a module that extends into an upstream chamber, the fibers have an open end supported and sealed in a head and are closed and extending into an upstream water chamber, as disclosed in EP 0938367 and as also mentioned in EP 2235502B1. The principle is analogous to the one just described and encounters the same problem.

[0019] A different form of configuration is disclosed in US 2004/078625, where two U-shaped membrane modules are housed in a single pipe and the bent arc parts facing each other. The water flows inside-out from the first module whose open ends are supported and sealed at the suction piece of the straw. The clean water enters the chamber between two modules and then flows outside-in from the second U-shaped module whose open ends are supported and sealed near the mouthpiece. This system is prone to air accumulation in the chamber between the two modules which can result in reduced water flow rate or higher requirement of suction pressure.

[0020] In contrast to the above configuration, a method is disclosed in US 8,852,439 B2, where a single U-shaped hollow fiber module is used in order to avoid air trapping with all hydrophilic fibers. The open ends are supported and sealed near the suction piece and the bent faces the mouthpiece. This is reversely configured compared to EP 2235502 B1. This configuration is claimed to have a reduced risk of air trapping as the volume inside the fibers is much smaller than the volume of the compartment. The water follows an inside-out flow pattern. The cleaning of the accumulated filtrate is done by blowing air from the mouth which results in backflushing.

[0021] The inside-out flow through the hollow fiber membrane as disclosed in US 8,852,439 B2 causes the coarse particles to get stuck inside the hollow fibers of the membrane. These particles increase the requirement of suction pressure or passage pressure or gravitational head with time and use. This extra suction pressure or passage pressure

or gravitational head along with stuck coarse particles causes cracks in the fiber walls.

[0022] These hollow fiber membrane-based filters face a common problem. Bacteria enter the filter body and hollow fibers, for example when air is blown from the mouth for back-flushing, when back-washing occurs using an external component, by exposure of the clean side to bacteria, due to poor sanitation, or due to an unclean environment. These bacteria stick with the walls and fibers and start to grow in colonies. These bacterial colonies grow on the filtered water side of the membrane as air is blown through mouthpiece of the filter or by back-washing using external component or by exposure of clean side to bacteria or due to poor sanitation or due to an unclean environment. This results in contamination of filtered liquid, and hence a failure to filter.

[0023] In order to tackle this problem, a method is disclosed in US 8,852,439 B2. A bacteriostatic/biocidal layer is applied in the inner walls of the filter so the bacteria do not grow and hence the filtered water is not contaminated. However, the problem is that this biocidal layer is only applied to filter housing (i.e. inner walls of filter body) and not on the membrane. Due to this, the membrane is prone to contamination (on the clean side). Also, this biocidal layer leaches out with erosion and hence migrates with the filtered liquid. This reduces the life of antimicrobial functionality. Biocidal materials (if leached out in outlet/filtered water) are known to have harmful effects on humans when ingested.

[0024] Another method used to mitigate the risk of bacterial growth inside the filter (e.g. due to backflushing or the exposure of clean side to bacteria or exposure to unclean environment / poor sanitation) is the use of silver Nanoparticles. Silver is an anti-microbial metal as it kills 99% of the microbes. Silver Nanoparticles leach out with time leaving larger cavities in the membrane walls which causes microbial slippage. Due to the migration of Nano silver particles, the anti-microbial effect also diminishes with time. (See US 7,390,343 and 9,200,086).

[0025] In all above filtration devices, the porosity of the hollow fibers is up to 80% and so high suction pressure or passage pressure or a gravitational head is required to filter liquid, as well as air trapping becomes a concern.

SUMMARY OF THE INVENTION:

[0026] The present invention aims to improve the quality of filtration by introducing novel intrinsic anti-microbial characteristics to a membrane. Optionally, other objectives may be achieved by the present invention, for example increasing the water flux so that air trapping is no more a problem and clogging of the membrane holes via air bubbles is reduced to the minimum extent; to reduce the suction pressure or passage pressure or gravitational head requirement of the hollow fibers for water filtration. In particular, the aim of the invention is to achieve better quality filtered water with a higher flow rate and lesser suction pressure or passage pressure or gravitational head.

[0027] The inventors have surprisingly found that one can provide a novel membrane which has inherent antimicrobial properties. This can be used in multiple purpose portable housings with multiple openings wherein liquids, such as water, flows outside-in through membrane fibers. It means that the membrane of the invention has built-in characteristics to act against microbes in order to provide a safe liquid, such as water, free from microbes.

[0028] The present invention also aims to provide a method for producing such a hollow fiber membrane, such a membrane may have a high level of strength and excellent in fractionation performance and water and other liquids permeation performance.

[0029] Accordingly, in a first aspect of the present invention, there is provided an intrinsically anti-microbial hollow fiber membrane module as defined in the claims.

[0030] A hollow fiber membrane may be characterized in that the outer surface or outer wall of the hollow fiber has hydrophobic characteristics whereas the inner surface or inner wall of membrane possess hydrophilic characteristics.

[0031] A hollow fiber membrane may have a pore size range from 0.1 nano meter to 25 nano meter.

[0032] A hollow fiber membrane may have a fiber diameter ranging from 0.2 mm to 0.6 mm.

[0033] A hollow fiber membrane may have a wall thickness from 1 mm to 2 mm.

[0034] A hollow fiber membrane may be characterized in that the outer surface or outer wall of the hollow fiber has hydrophobic characteristics whereas inner surface or inner wall of membrane possess hydrophilic characteristics having pore size range from 0.1 nano meter to 25 nano meter with fiber diameter ranging from 0.2 mm to 0.6 mm and wall thickness equal to 1 mm to 2 mm.

[0035] The inventors have found that the choice of polymers, and polymer mixes, can influence the pore formation and so the Pure Water Permeability (PWP) and Critical Water Flux (CWF). The formation of a large number of pores over a given area of fiber wall, and so a large % void by volume of the fiber wall, can be achieved by selection of polymers to construct the fibers. As described herein, fibers may comprise or consist of from 16% to 25% by weight, polyethersulfone, of from 5 to 20% by weight polyvinylpyrrolidone, of from 70% to 90% by weight, N-methyl pyrrolidone solution and of from 10% to 45% by weight polyethylene glycol. As described herein fibers may also comprise polycarbonates, polyamides, and aqueous isopropyl or any combination thereof. As described herein, fibers may comprise or consist of from 10%-25% by weight polysulfone and from 5% to 15% by weight polyvinyl pyrrolidone.

[0036] The fibers comprise or consist of polyethersulfone, optionally ultrason[®] polyethersulfon, optionally grade 6020p. The fibers comprise or consist of from 12% to 25%, polyethersulfone, of from 40% to 90%, N-methyl pyrrolidone and of

from 10% to 45% polyethylene glycol. Such a formulation may also include lithium chloride (optionally of from 0.5 to 1.5%).

[0037] The fibers may be provided in a number of confirmations. For example, the fibers may form a one-layer membrane, the fibers may form a membrane comprising more than one layer, the fibers may form a membrane that is a double layer (for example, involving two u-shaped sets of fibers provided opposed to each other within a closed system).

[0038] The multiple layers may permit different characteristics to be presented from each layer.

[0039] A single layer membrane can be either hydrophobic or hydrophilic. A double layer membrane can be either hydrophobic or hydrophilic. The outer side or wall of the membrane layer (ie the side facing the liquid to be filtered) can be hydrophobic and the inner side layer or wall (ie the side facing the lumen of each fiber and containing filtered liquid) is hydrophilic. The hydrophobic layer reduces the requirement of air trappings and suction pressure. The hydrophobic layer increases the liquid flux.

[0040] The hydrophilic layer allows maintenance of capillary action of the liquid through the pores on fiber walls towards the hollow cavity of fibers and decreases the requirement of suction pressure or passage pressure or gravitational head.

[0041] The liquid may flow with outside-in orientation (ie liquid to be filtered is provided outside of the fiber lumen, passing inside of the lumen when being filtered). Alternatively, the liquid may flow with inside-out orientation.

[0042] In an outside-in orientation, the filtrate is retained outside of the membrane.

[0043] For ease of maintenance, the membrane may be washable.

[0044] The fibers that define the membrane have pores in their walls through which water can pass. The multiple pores can result in a fiber being formed that has a void range of from 70 to 90% or 80% to 90% void by volume of fiber wall. The pore size can range from 0.1 nm to 25 nm in diameter. For usage under suction, the pore size can range from 50 nm to 150 nm in diameter.

[0045] The fibers of the membrane of the present invention may have a PWP (Pure Water Permeation) of greater than 1800 Lmh (Liters per meter square area of membrane per hour under one bar pressure) and/or a CWF (Critical Water Flux) of greater than 900 Lmh.

[0046] The hollow fibers can form a U-shaped membrane module with open ends where liquid entered in the membrane for filtration and filtered liquid comes out through the open ends of fibers. For example, as described in US Patent No. 5160673.

[0047] The fibers are preferably intrinsically antimicrobial in nature. This means that they are not simply coated with an antimicrobial substance. As a result, the antimicrobial nature of the membrane does not easily become dislodged to be ingested by the user. This may be achieved by an antimicrobial substance being embedded within the polymer system that forms the fibers. The antimicrobial substance is embedded by being physically trapped within the cross-linking between the polymeric chains. The antimicrobial substance is also chemically bonded within the crosslinked polymeric chains. The embedding of the antimicrobial substance within the polymer results in the formation of antimicrobial substance embedded polymer.

[0048] The antimicrobial substance is zinc oxide, zinc or zinc salt. Thus, the fibers of the present invention are rendered intrinsically antibacterial by adding at least one zinc salt to a solution or dispersion, in an aqueous or organic solvent, of the monomers used to synthesize the polymer that forms the fiber. Alternatively, at least one antimicrobial substance (eg a zinc salt) can be added during the reaction of polymerization of the starting monomers.

[0049] When a zinc salt is used to modify the polymer in order to render it intrinsically antibacterial, the salt may comprise or consist of any one or combination of PCA (zinc salt of pyrrolidone carboxylic acid), zinc oxide, zinc hydroxide, zinc pyrrolidone, and zinc pyrrhione.

[0050] The polymer into which the antimicrobial substance is embedded is Polyethersulfone.

[0051] The antibacterial polymer of the invention may be characterized in that has a release of zinc ions that is below the legal limits of 21 ppm.

[0052] The antibacterial polymer of the invention is effective for controlling or eliminating the bacterial proliferation of Gram- and Gram+ bacteria, e.g. *Escherichia coli* (Gram -) and/or *Staphylococcus aureus* (Gram +). Other examples can be selected from *Escherichia coli*, *Staphylococcus aureus*, *Pseudomonas aeruginosa*, *Acinetobacter baum*, *Ent. bloacae*, *C. albicans*, and *Clostridium species*, or combinations thereof.

[0053] In order to limit the amount of costly antimicrobial substance, and any residual loss of antibacterial substance into the filtered water, the entire fiber does not have to be formed from an antimicrobial embedded polymer. Substantially all of the externally facing surface of each fiber may include an anti-microbial substance within the substance of the polymer or polymer mix that forms the fiber. The modified polymer is mixed in such a way that 99% of the whole surface area of the membrane is antimicrobial in nature. The mixing is done through a process which ensures that even when in a small amount for instance 2.5 to 3% of the modified polymer is mixed with the rest of the polymeric mixture, 99% of the membrane surface area of the newly manufactured/spun membrane holds property of being intrinsically antimicrobial. Hence the fibers are antimicrobial from the outside as well as inside.

[0054] The method of forming such membrane as discussed above can result in the inherent formation of a fiber with the characteristics discussed above.

[0055] For example, the inventors have found that one can provide a high % void volume in the fiber wall by selecting

an appropriate pore former as part of the process of manufacture of the fibers.

[0056] Consequently, in a further aspect of the present invention, there is provided a process of making an intrinsically anti-microbial hollow fiber membrane, as defined in the claims.

[0057] The fibres comprise or consist of from 12% to 25 %, polyethersulfone, of from 40% to 90%, N-methyl pyrrolidone and of from 10% to 45% polyethylene glycol. Such a formulation may also include lithium chloride (optionally of from 0.5 to 1.5%).

[0058] The PEG may be provided in solution; for example an aqueous solution (eg 9: 1 PEG:Water solution, or +/- 10% thereof) .

[0059] The non-solvent used in step b) may be water.

[0060] In addition to optimizing the pore formation, the inventors have found that they are able to construct fibers with the antimicrobial property towards the external portions of the wall, but still intrinsic to the fibers; thereby conserving the substances used to provide intrinsic antimicrobial properties. Consequently, the method may comprises the steps of:

ai) adding at least said antimicrobial substance to a solution or a dispersion in an aqueous solution or organic solvent of monomers used to synthesize the polyethersulfone polymer that forms the fiber; or

a ii) adding said antimicrobial substance during the reaction of polymerization of starting monomers used to synthesize the polyethersulfone polymer that forms the fiber such that the antimicrobial substance is physically trapped and chemically bonded within the cross linked polymeric chains of the polymer rendering the polymer intrinsically antimicrobial in nature

b) passing the dope mixture produced through a spinneret together with a non-solvent.

[0061] Step b) for all processes of the present invention may be carried out at a temperature of from 25 to 80°C, or 40 to 60 °C, optionally 50 °C (at atmospheric pressure). The spinneret is required to operate at high speed. For example, it may operate at a speed of from 350 to 600 rpm, or from 450 to 550rpm, optionally 500rpm.

[0062] The polymers are more able to form a solution with the solvent than with the non-solvent. Consequently, as the solvent and non-solvent come into contact with each other during step b), the polymers are driven out of the solvent and solidify. The rapid solidification of the polymer at speed whilst being ejected by the spinneret forms pores in the created fibers. At the same time, the centrifugal forces induced by the spinneret on the forming fibers pulls the polymer with antimicrobial substance embedded therein to the outer surface of the forming fiber, this polymer being denser than that with no antimicrobial substance. In this way the fiber is formed with pores and with the outer portion of the fiber including the predominant amount of polymer with embedded antimicrobial polymer, the remainder being formed from the polymer absent from the antimicrobial substance.

[0063] This processes for both further aspects of the present invention may be used to form the membrane of the first aspect of the present invention. Consequently, all features of the first aspect of the present invention may apply equally to the further aspects of the present invention. For example, the antimicrobial substance may be a metal oxide or metal. The anti-microbial substance embedded polymer or polymer mix may be from 2-5% by weight of the total polymers in the mixture formed in step a).

[0064] The polymer or a polymer mix absent of an antimicrobial substance may form from 95-98% by weight of the fiber.

[0065] The polymer comprises or consists of polyethersulfone. The solvent is N-Methyl-2-pyrrolidone.

[0066] The antimicrobial substance embedded polymer is polyethersulfon (eg ultrason® polyethersulfon, optionally grade 6020p) and the polymer or a polymer mix absent of an antimicrobial substance is polyethersulfon (eg ultrason® polyethersulfon, optionally grade 6020p), the polymers being provided in a 3% to 97% weight ratio.

[0067] The membrane may be incorporated into a conventional device for liquid filtration, for example any of those described in the review of the prior art above.

[0068] Accordingly, in yet a further aspect of the present invention, there is provided a device for liquid filtration comprising a hollow fiber membrane as described in the first aspect of the present invention wherein the membrane is placed in a housing with at least one feed channel and at least one drain channel. The membrane may be placed in a housing with multiple openings for inlet, outlet, and backflush drains. The hydrophilic layer of the membrane maintains a capillary action of the liquid through the holes on fiber walls towards the hollow cavity of fibers and decreases the requirement of suction pressure or passage pressure or gravitational head.

BRIEF DESCRIPTION OF THE DRAWINGS

[0069] The present invention is now described, by way of example only, and with reference to the following figures

Figure 1 depicts hollow fibers (2), fibers ends sealed and potted (3), and potting module (4).

Figure 2 depicts nano pores on a fiber wall and through which a liquid enters the lumen of the hollow fiber (1), and

hollow fibers (2).

Figure 3 depicts nano pores on a fiber wall and through which a liquid enters the lumen of the hollow fiber (1), filtered liquid (5), cavities in fiber walls (6), hydrophilic layer (7), meeting point of both layers (8), space created between liquid and fiber due to hydrophobic layer (9), coarse particles, impurities, contaminations (10), hydrophobic layer facing unfiltered liquid (11), and unfiltered liquid (12)

Figure 4 depicts nano pores on fiber walls through which a liquid is entered (1), hollow fibers (2), fibers ends sealed and potted (3), potting module (4), filtered liquid (5), cavities in fiber walls (6), hydrophilic layer (7), meeting point of both layers (8), space created between liquid and fiber due to hydrophobic layer (9), coarse particles, impurities, contaminations (10), hydrophobic layer facing unfiltered liquid (11), and unfiltered liquid (12).

Figure 5 depicts ends of hollow fibers from which filtered liquid comes out (13), potting module wall (14), and the sealant between the fiber ends (15).

Figure 6 depicts a SEM Picture of the fiber wall thickness close-up.

Figure 7 depicts a SEM Picture of the fiber wall thickness in whole cross section.

Figure 8 depicts a chart of the water flux over time derived from a study of 10 membranes made according to the present invention

Figure 9 depicts the results of an antibacterial study of the fiber material of the present invention.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0070] Hereinafter, preferred embodiments of the present invention will be described in detail with reference to the accompanying drawings. The aspects and features of the present invention and methods for achieving the aspects and features will be apparent by referring to exemplary embodiments to be described in detail with reference to the accompanying drawings. However, the present invention is not limited to the exemplary embodiments disclosed hereinafter but can be implemented in various forms. The matters defined in the description, such as the detailed construction and elements, are nothing but specific details provided to assist those of ordinary skill in the art in a comprehensive understanding of the invention, and the exemplary embodiments are only defined within the scope of the appended claims. In the drawings, sizes and relative sizes of layers and areas may be exaggerated for clarity in explanation.

[0071] The term "on" that is used to designate that an element is on another element located on a different layer or a layer includes both a case where an element is located directly on another element or a layer and a case where an element is located on another element via another layer or still another element. By contrast, the term "directly on" means that an element is directly on another element or a layer without the intervention of any other element or layer. In the entire description of the present invention, the same drawing reference numerals are used for the same elements across various figures. Also, the term "and/or" includes the respective described items and combinations thereof.

[0072] Spatially relative wordings "below", "beneath", "lower", "above", "upper", and so forth, as illustrated in the drawings, may be used to facilitate the description of relationships between an element or constituent elements and another element or other constituent element. The spatially relative wordings should be understood as wordings that include different directions of the element in use or operation in addition to the direction illustrated in the drawings.

[0073] In the following description of the present invention, an exemplary embodiment of the present invention will be described with reference to plane views and sectional views which are ideal schematic views. The form of exemplary views may be modified due to manufacturing techniques and/or allowable errors. Accordingly, the exemplary embodiments of the present invention are not limited to their specified form as illustrated but include changes in the form being produced according to manufacturing processes. Accordingly, areas exemplified in the drawings have rough properties, and the shapes of areas in the drawings are to exemplify specified forms of areas of elements but do not limit the scope of the present invention.

[0074] Hereinafter, A representative example of the structure of the hollow fiber filter membrane (hereinafter sometimes referred to as merely "membrane") of the present invention will be explained referring to the accompanying drawings. FIG. 1 is an enlarged photograph of a cross section perpendicular to the lengthwise direction of the membrane, and FIG. 2 is an enlarged photograph of the inner surface of the membrane.

[0075] The membrane of the present invention is formed from a number of hollow fibers, each having an inner surface and an outer surface, and comprises a network structure which integrally continues from one surface (e.g., the inner surface) to another surface (e.g., the outer surface) as shown in FIG. 3. The network structure in the membrane has no

vacant portions of the polymer such as a finger-shaped structure layer having cavities and a void layer.

[0076] The membrane of the present invention comprises a network structure having an anisotropy in pore diameter, such that the membrane has a layer with a lower average pore diameter of pores present therein (hereinafter referred to as "average pore diameter of the outer surface") in the outer surface or near the outer surface compared to the average pore diameter of pores present in the inner surface of the membrane (hereinafter referred to as "average pore diameter of inner surface"). The pore diameter generally becomes gradually greater toward the inner surface of the membrane form that towards the outer surface of the membrane. According to an embodiment of the invention, it is ensured that more than 99% of the pores are of the size of mentioned diameter on the outer surface (hereinafter referred to as "average pore diameter of outer surface").

[0077] The membrane of the present invention has a void content of 70-90% when the material of the membrane is polyethersulfone and depending on the void content, the breaking stress IS in the range of 2 to 3.5- bar and the breaking elongation is up to 70%.

[0078] In a further aspect of the present invention, there is also described a filtering device for liquid filtration comprising a hollow fiber membrane of the invention as defined in the claims, wherein the membrane comprises a housing for the membrane, wherein the housing comprises at least one feed channel and at least one drain channel, and optionally multiple openings for inlet, outlet and backflush drains. According to the device of the invention, the hydrophilic layer of membrane maintains a capillary action of the liquid through the holes on the fiber walls towards the hollow cavity of fibers and decreases the requirement of suction pressure or passage pressure or gravitational head.

[0079] The intrinsically anti-microbial hollow fiber membrane is produced by spinning the polymer mixture at high speed revolutions to place the said polymer mixture at the circumference of the base polymers, wherein the polymer mixture comprising of 3% of antimicrobial embedded polyethersulfon 6020p in base polyethersulfon that does not include an antimicrobial substance which gives around 99.9% surface area of the finished product as antimicrobial. As the antimicrobial embedded polymer has higher density, the centrifugal force pushes it out-wards and places it at the circumference of the base polymer which reduces the cost of production of a product. The antimicrobial polymer is chemically developed by embedding the metal oxide particles in polymers through cross-linking between the polymeric chains. This produces an intrinsically antimicrobial polymer where the substances imparting antimicrobial properties never leach out and never migrate from the polymer to any other substance in contact.

[0080] Examples of the present invention will be shown below, but the present invention is not limited to these examples. Methods for the measurement of properties are as follows:

[0081] The hollow fiber membranes used as samples for measurement are all in the state of being sufficiently impregnated with water. As for the membrane obtained by using polyvinyl pyrrolidone as an additive, the membrane was dipped in an aqueous sodium hypochlorite solution and then washed with hot water to make a membrane in which substantially no polyvinyl pyrrolidone was present.

[0082] Water permeation of the hollow fiber membrane was expressed by the amount of filtered water when ultrafiltration water of 25.degree. C. was allowed to permeate through a sample of the hollow fiber.

EXAMPLE 1

[0083] It is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

[0084] The device of the present invention is an intrinsic anti-microbial hollow fiber membrane. The membrane received an intrinsic change on a micrometrical scale which results in antiseptic and antibacterial characteristics. The adhesion and proliferation of bacteria on the surface of the object are slowed down and the microbes and bacteria count is being strongly reduced. This antiseptic/anti-microbial nature of the material is the intrinsic property of the membrane polymer and never migrates / leaches with filtered liquid and never diminishes with use/time.

[0085] The hollow fiber consists of two layers. The outer layer is hydrophobic and the inner layer is hydrophilic by nature. The hydrophobic layer never allows the water to come in physical contact with membrane hence stops any adherence of any kind on it. Hydrophobic layer makes the air trappings minimum as the outside-in passage of air is facilitated by the absence of water layer on the outside hence decreasing the suction pressure requirement and increasing the flux of liquid. While the inner hydrophilic layer maintains a capillary action of the liquid through the holes on fiber walls towards the hollow cavity of fibers hence decreasing the requirement of suction pressure or passage pressure or gravitational head. The liquid flows in outside-in orientation i.e. filtration happens when liquid from the outside of the fiber wall passes through its hole and filtered liquid comes out of the hollow ending of the fiber. Hence keeping the unfiltered liquid outside the fiber walls and retaining the filtered liquid inside the hollow fiber. Making it the only membrane used with outside-in direction of flow while having a hydrophobic layer on its outside and a hydrophilic layer on its inside.

[0086] Fibers can have pores ranging from 0.1 nm to 25 nm in its walls. The liquid especially water is filtered when it passes to the hollow cavity of fiber from the holes in its walls from the outside of the fiber. The fibers make U-shaped membrane modules with open ends sealed and supported in such a way that U-shaped side always faces the liquid

coming for filtration and filtered liquid always comes out through the open ends of fibers. The porosity of the fibers ranges from 70 % to 90 %.

[0087] The anti-microbial embedded polymer is developed by chemically bonding metal oxide particles in polymer ultrason Polyethersulfon (A BASF brand), which produces an intrinsically antimicrobial polymer in which the antimicrobial never leaches out and never migrates from the polymer to any other substance come in contact with the surface of the polymer unlike the existing antimicrobial membranes on which antimicrobial has been created by coating the surface with an antimicrobial substance which may leaches out and contaminate the substance which comes into contact with it. Polyethersulfon is the polymer of which the hollow fibers of the membrane are made.

[0088] The porosity is achieved during the hollow fiber membrane manufacturing process. The process involves the use of 2 tanks connected to the spinneret via gearpump assisted flow tubes. The dope solution tank and the bore solution tank. The polymers are mixed with a solvent where they totally dissolve in the dope solution tank. As soon as the flow of both dope and bore solution (also called as the non-solvent) starts through the spinneret of the spinning machine the process of phase inversion starts (the polymer that was dissolved in the solvent now will start to solidify). This phenomenon can be explained by the simple process of mass-transfer, as soon as the non-solvent and solvent come in contact the interaction between them acts as the driving force to push the dissolved base polymer out of the solvent and hence it starts to solidify again. During this process the pores are created because the instantaneous (very short, takes less than a second) de-mixing the time period too short for the polymer to solidify completely and hence as the polymer starts to come out of the solvent and solidify, the instantaneous nature of de-mixing renders some discontinuities in the solidifying polymeric structure and these discontinuities (spaces) are ultimately the pores and all these pores combined to give the porosity to the fiber. The process of fiber formation is carried out at 50 degrees Celsius at atmospheric pressure with the spinneret operating at 500rpm. 3% by weight of the total polymer is formed from the antimicrobial embedded polymer, whilst 97% is antimicrobial substance absent polymer.

Example 2:- Pore Formation (not according to the invention)

[0089] A dope solution/ polymer solution was made by combining the components in the table below. To this, the below described bore solution/inner solution was added and the combination thoroughly mixed. This mixture was then passed through a spinneret along with water in order to form hollow fibers.

1. In the process of making dope solution, low molecular weight additives (such as LiCl etc) should be added first in the solvent with constant agitation and at 50°C.
2. Gradually, additives with the higher molar masses (such as PEG, PVP etc) should be introduced into the solvent at constant stirring.
3. Lastly, the base polymer (such as PES, PSU etc.) will be introduced in the dope solution under the constant stirring and at 80°C for approx. three hours.
4. Dope solution will only be considered ready for spinning, until all the additives and the base polymer is homogeneously dissolved in the solvent. The dope solution should be in one phase before spinning along with the absence of any air bubbles and foreign particles.
5. Dope solution should be left overnight or for sufficient amount of time, without agitation, in order to remove the air bubbles, generate during stirring.
6. The spinneret temperature should be at room temperature but the temperature of the coagulant liquid should be at 50 °C.
7. The bore liquid can be either pure PEG or a mixture of PEG:Water 9: 1 or NMP:Water 9:1

Dope Solution/Polymer Solution (% by volume)	Bore Solution/Inner Solution	Coagulant
PES 15% Polyethersulone (Ultrason® E6020P)	PEG:Water (9:1)	100% Water
PEG 38% (Polyethylene glycol)		
LiCl (Lithium Chloride) 1.5%		
H2O 2%		
NMP (N-methyl-2-Pyrrolidone) 43.5 %		

[0090] It has been found that fibers produced according to the above process, through testing and benchmarking the performance of these fibers, are superior as compared to the fibers available currently at disposal or cited in the prior arts. The PWP and CWF values are higher then what usually are reported for such fibers in the published literature. PWP value of 1800 Lmh and CWF value of 900 Lmh for fibers with 20 nm pore size is higher than those compared to the Hollow fiber membranes for ultrafiltration.

[0091] When PEG is used as the bore solution and as a pore former in the dope, it is believed due to its high viscosity and flowing behavior, it has been observed to impart properties to the nascent fibers in terms of morphology. In particular, the fibers tend to have a well pronounced finger-like pore structures, hence having straight and wellpronounced channels along the thickness of the fiber as seen in the Fig.6 and Fig.7, the picture of the wall thickness taken with a Scanning Electron Microscope (SEM) when the fiber is observed with the instrument with its cross-section facing the observer.

[0092] The Pure Water Permeation and Critical Water Flux for the fibers made according to the above method were then established.

[0093] Pure Water Permeability (PWP): The pure water permeability, also known as the pure water flux is defined as the volume of water that passes through a membrane per unit time, per unit area and pre-unit of transmembrane pressure. This property indicates the effort required to generate permeate for a membrane and can be used to compare the initial performance of a membrane. This analysis does not, however, provide any guidance as to the performance of the material for extended periods of time and so it is also useful to look at Critical Water Flux.(see Persson, Kenneth M., Vassilis Gekas, and Gun Trägårdh. "Study of membrane compaction and its influence on ultrafiltration water permeability." Journal of membrane science 100, no. 2 (1995): 155-162.)

[0094] Critical Water Flux (CWF): Either as the flux at which the transmembrane pressure (TMP) starts to deviate from the pure water line (the strong form of critical flux) or as the first permeate flux for which irreversible fouling appears on the membrane surface. The critical flux can be generally defined as the "first" permeate flux for which fouling becomes predominant; being then well differentiated from limiting flux (the "last" flux reachable). (see Bacchin, Patrice, Pierre Aimar, and Robert W. Field. "Critical and sustainable fluxes: theory, experiments, and applications." Journal of membrane science 281, no. 1-2 (2006): 42-69).

[0095] 10 separate samples of the fibers made according to the above methodology were created and used to form 10 separate membranes. The membranes were tested to establish their PWP and CWF. The membranes formed were tested for their PWP and CWF by:

Pure water flux experiments were performed using deionized water. Each module was immersed in deionized water for 24 h, and run in the test system for 1 1/2 h, to eliminate the effect of the residual glycerol on the hollow-fiber membranes before any sample collection. A UF experimental unit designed to evaluate the PWP and protein rejection is shown in detail (Please see: C.S. Feng, B. Shi, G. Li, Y. Wu, Preparation and properties of microporous membrane from polyvinylidene fluoride cotetrafluoroethylene) (F2.4) for membrane distillation, J. Membr. Sci. 237 (2004) 15-24.). A transmembrane pressure of 1 bar and feed solution temperature of 20 °C, all experiments were performed in hollow-fiber modules with crossflow mode. Two modules were prepared for each hollow-fiber sample.

[0096] Pure water permeation fluxes (PWP) were obtained as follows:

When the pure water is passed through the membrane and readings calculated using the equation above each value is tabulated and a graph between time and the readings is plotted. For the prolonged or extended period of time (in our case more than 5 hours) the PWP value begins to stabilize signifying the CWF value for the membrane at this point.

The apparatus used for carrying out the PWP tests on the fibers can be represented by the following schematic:

The results and essential conditions for the test are provided in Table 1 below. The test was carried out at STP.

Table-1:

The table enlists the data recorded during for the PWP test performed on the 10 hollow fiber membrane samples prepared.

Flux Tables -5 pairs from 10 samples

12

EP 3 563 928 B1

[0097] Table 2 provides a summary of the Pub Water Flux established over 5-minute intervals over a 120 minute period for each of the membranes. The results are also charted in Figure 8

Table 2:

5

10

15

20

25

30

35

40

45

50

55

[0098]

Table 2 provides a summary of the Pure Water Flux established over 5-minute intervals over a 120 minute period for each of the membranes. The results are also charted in Figure 8

Sample-1 LMH	Sample-2 LMH	Sample-3 LMH	Sample-4 LMH	Sample-5 LMH	Sample-6 LMH	Sample-7 LMH	Sample-8 LMH	Sample-9 LMH	Sample-10 LMH
2380	1790	1910	1810	2215	1815	1950	2140	2370	2040
1540	1270	1655	1585	1955	1290	1570	1690	1230	1560
1080	1230	1415	1345	1590	1240	1260	1260	1070	1100
920	1070	1190	1135	1240	1110	1130	990	920	920
820	930	895	870	730	985	945	760	830	890

[0099] From these results, it can be seen that there is a good level of consistency across each of the samples. It can also be concluded that the initial PWP readings are higher as compared to the conventional fibers, although over the prolonged testing the PWP readings tend to decline and stabilize at a point (where the graph tends to become straight and have a constant slope) which is designated as the CWF for the respective membrane and CWF is the parameters which is used as the design factor when such membranes are used in their practical applications. However it can be seen that for all the samples the CWF is in the range of 800 to 900 Lmh, which again is an advantageous property of the fibers describes in the present invention, as it will require less pressure to permeate the same amount of water through these fiber as compared to the conventional ones, hence saving costs.

Example 3: Testing for the antimicrobial nature of the membrane fiber surface

[0100] A membrane was provided with hollow fibers made according to Example 2, but with zinc salt embedded within the polymer.

[0101] The membrane was then tested for its ability to inhibit two types of bacterial strains (*Escherichia Coli* ATCC 8739 (Gram -) and *Staphylococcus Aureus* 6538 (Gram +)) using the standard international method for evaluating the antibacterial of the polymer surfaces. The results can be found in the images of bacterial cultures grown on the Petri dishes and shown in the Fig.9. The results are provided below.

Table 3

The membrane was then tested for its ability to inhibit two types of bacterial strains (<i>Escherichia Coli</i> ATCC 8739 (Gram -) and <i>Staphylococcus Aureus</i> 6538 (Gram +)) using the standard international method for evaluating the antibacterial of the polymer surfaces. The results can be found in the images of bacterial cultures grown on the Petri dishes and shown in the Fig.9. The results are provided below.						
Microbial Strains	Initial inoculum (cfu/ml)	Incubation at 37 degree Celsius for 24 hours	Control inoculum (cfu/ml)	Spun polymeric fiber	Reduction log	Reduction %
<i>Escherichia Coli</i>	2.5×10^6		6.2×10^7	1.0×10^4	3.1	99.9
<i>Staphylococcus</i>	11.7×10^6		2.5×10^7	1.4×10^4	2.9	99.9

[0102] As can be seen, the zone of inhibition for the tests carried out on the spun polymeric fiber (ie the polymer with zinc salt embedded therein) match the geometry of the fiber sample placed on the petri dish; representing an almost complete kill of the bacteria on the portions of the disk to which the fiber was applied. This is confirmed by the CFU/ml reduction presented in Table 3 for the initial inoculum compared to that calculated for the spun polymer fiber.

Test method:

[0103] A hollow fiber obtained by spinning the antibacterial polymer Polyethersulfone prepared as described above was tested to evaluate the effectiveness of the polymer against the main microbial strains defined by current legislation regarding plastic products intended to come into contact with the skin.

[0104] The product was tested for 2 types of bacterial strains (*Escherichia Coli* ATCC 8739 (Gram-) and *Staphylococcus Aureus* ATCC 6538 (Gram+)) using the standard international method for evaluating the antibacterial activity of non-porous plastic surfaces.

[0105] Moulded Initial Incubation Control polymer MICROBIAL inoculum at 37° C. inoculum item Reduction STRAINS (cfu/ml) for 24 h (cfu/ml) (cfu/ml) log Reduction % *Escherichia* 2.5×10^6 6.2×10^7 1.0×10^7 0.79 83.87% *coli* *Staphylococcus* 1.7×10^6 2.3×10^7 1.4×10^6 1.2 93.91% *Aureus* The initial bacterial suspensions were diluted so as to obtain a known bacterial concentration expressed in colony forming units—cfu/ml. The fibers analyzed were duly sectioned in order to produce pieces of optimal dimensions for conducting the tests. These were treated with the reference microbial strains, covered with sterile polyethylene film and placed in an incubator at a temperature of $37 \pm 1^\circ$ C. for 24 hours. At the end of the incubation period the samples were washed with neutralizing solution, on which the residual microbial count was determined.

[0106] The results obtained show that after 24 hours of incubation at 37° C. the polymer treated with zinc reduces the bacterial count by 83.870 (in the case of *Escherichia coli*) and 93.91% (in the case of *Staphylococcus aureus*).

Figure 9. Explanation:

[0107] As can be seen from the figure that there are 6 petri dishes in total in two sets of 3 each.

[0108] The 3 on top have a substance impregnated with silver Nano-particles to give the substance a biocidal property and the 3 below have the sample extracted from the fiber surface of the present invention (spun hollow fiber membranes). It can be seen that the Nano-particles have leached out in the above 3 petri dishes migrating/leaching out of the substance to kill the bacteria around the sample. However the bacterial growth in the lower 3 petri dishes is only inhibited at the surface if the sample which substantiates the claim that the substance responsible for imparting antimicrobial property does not leach out of the material of the present invention.

Claims

1. An intrinsically anti-microbial hollow fiber membrane module for filtration of liquids comprising a plurality of porous hollow membrane fibers wherein the fibers are formed from a polymer by embedding into said polymer an anti-microbial substance, wherein the polymer used to form the fibers is polyethersulfone, wherein the anti-microbial substance is selected from zinc oxide, zinc, a zinc salt, or a zinc salt in an aqueous or organic solvent, and the at least one said antimicrobial compound is added to a solution or a dispersion in an aqueous solution or organic solvent of the monomers used to synthesize the polyethersulfone polymer used to form the fibers or the said antimicrobial compound is added during the reaction of polymerization of the starting monomers used to synthesize the polyethersulfone polymer used to form the fibers such that the antimicrobial substance is physically trapped and chemically bonded within the crosslinked polymeric chains of the polymer rendering the polymer intrinsically anti-microbial in nature,; wherein the hollow membrane fibers are prepared from a dope comprising 12% to 25% polyethersulfone, from 10 to 45% polyethylene glycol, and from 40% to 90% N-methyl pyrrolidone solution; and optionally the fibers further comprise lithium chloride; wherein the percentages are in weight ratio, and wherein in use the liquid enters from outside of the fiber membranes and passes through the porous membranes into and along the lumen of the fibers, thereby retaining the retentate outside of the membranes and filtered liquid (filtrate) flows out from the hollow end of the fibers.

2. A hollow fiber membrane module according to claim 1, wherein the hollow fibers are provided in the form of a U-shaped bundle.

3. A method of producing the intrinsically anti-microbial hollow fiber membrane for a module of claim 1 wherein the polymer used to form a fiber is polyethersulfone wherein a hollow membrane fiber is formed from a dope comprising 12% to 25% polyethersulfone, from 10 to 45% polyethylene glycol, and from 40% to 90% N-methyl pyrrolidone solution; and optionally the fiber further comprises lithium chloride; wherein

the percentages are in weight ratio, wherein the fiber is formed from said polymer by embedding into the polyethersulphone polymer an anti-microbial substance via the following steps (ai) or (aii)

and wherein the anti-microbial substance is selected from zinc oxide, zinc, a zinc salt, or a zinc salt in an aqueous or organic solvent

ai) adding at least said antimicrobial substance to a solution or a dispersion in an aqueous solution or organic solvent of monomers used to synthesize the polyethersulfone polymer that forms the fiber; or

aii) adding said antimicrobial substance during the reaction of polymerization of starting monomers used to synthesize the polyethersulfone polymer that forms the fiber such that the antimicrobial substance is physically trapped and chemically bonded within the cross linked polymeric chains of the polymer rendering the polymer intrinsically antimicrobial in nature; and

b)

passing the dope mixture produced through a spinneret together with a non-solvent.

4. The process according to claim 3, wherein: -

step b) is carried out at a temperature of from 25 to 80° C

5. A device for liquid filtration comprising an intrinsically anti-microbial hollow fiber membrane module as defined in claims 1 or 2, wherein the device comprises a housing for the membrane, wherein the housing comprises at least one feed channel and at least one drain channel, or; and optionally with multiple openings for inlet, outlet, and backflush drains.

Patentansprüche

1. Intrinsisch antimikrobielles Hohlfasermembranmodul zur Filtration von Flüssigkeiten, umfassend eine Vielzahl von porösen Hohlmembranfasern, wobei die Fasern aus einem Polymer durch Einbetten einer antimikrobiellen Substanz in das Polymer gebildet sind, wobei das Polymer, das zum Bilden der Fasern verwendet wird, Polyethersulfon ist, wobei die antimikrobielle Substanz ausgewählt ist aus Zinkoxid, Zink, einem Zinksalz oder einem Zinksalz in einem wässrigen oder organischen Lösungsmittel, und die mindestens eine antimikrobielle Verbindung zu einer Lösung oder einer Dispersion in einer wässrigen Lösung oder einem organischen Lösungsmittel der Monomere hinzugefügt wird, die zur Synthese des zum Bilden der Fasern verwendeten Polyethersulfonpolymers verwendet werden, oder die antimikrobielle Verbindung während der Polymerisationsreaktion der Ausgangsmomere, die zur Synthese des zum Bilden der Fasern verwendeten Polyethersulfonpolymers verwendet werden, hinzugefügt wird, sodass die antimikrobielle Substanz physikalisch in den vernetzten Polymerketten des Polymers gefangen und chemisch gebunden ist, wodurch das Polymer von Natur aus antimikrobiell wird,; wobei die Hohlmembranfasern aus einem Dotierstoff hergestellt werden, umfassend 12 % bis 25 % Polyethersulfon, von 10 bis 45 % Polyethylenglykol und von 40 % bis 90 % N-Methylpyrrolidonlösung; und optional wobei die Fasern ferner Lithiumchlorid umfassen; wobei die Prozentsätze in Gewichtsverhältnis sind, und wobei die Flüssigkeit im Gebrauch von außerhalb der Fasermembranen eintritt und durch die porösen Membranen in und entlang des Lumens der Fasern verläuft, wodurch das Retentat außerhalb der Membranen zurückgehalten wird und gefilterte Flüssigkeit (Filtrat) aus dem hohlen Ende der Fasern herausfließt.
2. Hohlfasermembranmodul nach Anspruch 1, wobei die Hohlfasern in Form eines U-förmigen Bündels bereitgestellt sind.
3. Verfahren zum Herstellen der intrinsisch antimikrobiellen Hohlfasermembran für ein Modul nach Anspruch 1, wobei das Polymer, das zum Bilden einer Faser verwendet wird, Polyethersulfon ist, wobei eine Hohlmembranfaser aus einem Dotierstoff gebildet ist, umfassend 12 % bis 25 % Polyethersulfon, von 10 bis 45 % Polyethylenglykol und von 40 % bis 90 % N-Methylpyrrolidonlösung; und optional wobei die Faser ferner Lithiumchlorid umfasst; wobei die Prozentsätze in Gewichtsverhältnis sind, wobei die Faser durch Einbetten einer antimikrobiellen Substanz in das Polyethersulfonpolymer über die folgenden Schritte (ai) oder (aii) aus dem Polymer gebildet wird und wobei die antimikrobielle Substanz ausgewählt ist aus Zinkoxid, Zink, einem Zinksalz oder einem Zinksalz in einem wässrigen oder organischen Lösungsmittel
 - ai) Hinzufügen mindestens der antimikrobiellen Substanz zu einer Lösung oder einer Dispersion in einer wässrigen Lösung oder einem organischen Lösungsmittel von Monomeren, die zur Synthese des die Faser bildenden Polyethersulfonpolymers verwendet werden; oder
 - aii) Hinzufügen der antimikrobiellen Substanz während der Polymerisationsreaktion von Ausgangsmomeren, die zur Synthese des Polyethersulfonpolymers verwendet werden, das die Faser bildet, sodass die antimikrobielle Substanz physikalisch in den vernetzten Polymerketten des Polymers gefangen und chemisch gebunden ist, wodurch das Polymer von Natur aus antimikrobiell wird; und
 b) Durchleiten des erzeugten Dotierstoffgemischs durch eine Spinn Düse zusammen mit einem Nichtlösungsmittel.
4. Verfahren nach Anspruch 3, wobei: -
Schritt b) bei einer Temperatur von 25 bis 80 °C durchgeführt wird.
5. Vorrichtung zur Flüssigkeitsfiltration, umfassend ein intrinsisch antimikrobielles Hohlfasermembranmodul nach Anspruch 1 oder 2, wobei die Vorrichtung ein Gehäuse für die Membran umfasst, wobei das Gehäuse mindestens einen Zufuhrkanal und mindestens einen Abflusskanal umfasst, oder;
und optional mit mehreren Öffnungen für Einlass, Auslass und Rückspülungsabflüsse.

Revendications

1. Module de membrane à fibres creuses intrinsèquement antimicrobienne destiné à la filtration de liquides comprenant une pluralité de fibres de membrane creuses poreuses, lesdites fibres étant formées à partir d'un polymère en incorporant dans ledit polymère une substance antimicrobienne, ledit polymère utilisé pour former les fibres étant de la polyéthersulfone, ladite substance antimicrobienne étant choisie parmi l'oxyde de zinc, le zinc, un sel de zinc ou un sel de zinc dans un solvant aqueux ou organique, et ledit au moins un dit composé antimicrobien étant ajouté

à une solution ou à une dispersion dans une solution aqueuse ou dans un solvant organique des monomères utilisés pour synthétiser le polymère de polyéthersulfone utilisé pour former les fibres ou ledit composé antimicrobien étant ajouté lors de la réaction de polymérisation des monomères de départ utilisés pour synthétiser le polymère de polyéthersulfone utilisé pour former les fibres de sorte que la substance antimicrobienne soit piégée physiquement et liée chimiquement dans les chaînes polymères réticulées du polymère en rendant le polymère intrinsèquement antimicrobien par nature ; lesdites fibres de membrane creuses étant préparées à partir d'un agent de dopage comprenant 12 % à 25 % de polyéthersulfone, de 10 à 45 % de polyéthylène glycol et de 40 % à 90 % de solution de N-méthyl pyrrolidone ; et éventuellement lesdites fibres comprenant en outre du chlorure de lithium ; les pourcentages étant exprimés en rapport pondéral, et, lors de l'utilisation, ledit liquide pénétrant depuis l'extérieur des membranes fibreuses et passant à travers les membranes poreuses dans et le long de la lumière des fibres, ce qui permet de retenir le rétentat à l'extérieur des membranes et l'écoulement du liquide filtré (filtrat) depuis l'extrémité creuse des fibres.

2. Module de membrane à fibres creuses selon la revendication 1, lesdites fibres creuses étant fournies sous la forme d'un faisceau en forme de U.

3. Procédé de production de la membrane à fibres creuses intrinsèquement antimicrobienne destinée à un module selon la revendication 1, ledit polymère utilisé pour former une fibre étant la polyéthersulfone, une fibre de membrane creuse étant formée à partir d'un agent de dopage comprenant 12 % à 25 % de polyéthersulfone, de 10 à 45 % de polyéthylène glycol, et de 40 % à 90 % de solution de N-méthyl pyrrolidone ; et éventuellement ladite fibre comprenant en outre du chlorure de lithium ; lesdits pourcentages étant exprimés en rapport pondéral, ladite fibre étant formée à partir dudit polymère en incorporant dans le polymère de polyéthersulfone une substance antimicrobienne par le biais des étapes (ai) ou (aii) suivantes,

et ladite substance antimicrobienne étant choisie parmi l'oxyde de zinc, le zinc, un sel de zinc ou un sel de zinc dans un solvant aqueux ou organique

ai) en ajoutant au moins ladite substance antimicrobienne à une solution ou à une dispersion dans une solution aqueuse ou dans un solvant organique de monomères utilisés pour synthétiser le polymère de polyéthersulfone qui forme la fibre ; ou

a ii) en ajoutant ladite substance antimicrobienne lors de la réaction de polymérisation des monomères de départ utilisés pour synthétiser le polymère de polyéthersulfone qui forme la fibre de sorte que la substance antimicrobienne soit piégée physiquement et liée chimiquement à l'intérieur des chaînes polymères réticulées du polymère en rendant le polymère intrinsèquement antimicrobien par nature ; et

b) en faisant passer le mélange d'agent de dopage produit à travers une filière conjointement avec un non solvant.

4. Procédé selon la revendication 3 :

- ladite étape b) étant réalisée à une température de 25 à 80°C.

5. Dispositif de filtration de liquide comprenant un module de membrane à fibres creuses intrinsèquement antimicrobienne tel que défini dans la revendication 1 ou 2, ledit dispositif comprenant un logement pour la membrane, ledit logement comprenant au moins un canal d'alimentation et au moins un canal de drainage, ou ; et éventuellement avec de multiples ouvertures pour les drains d'entrée, de sortie et de rinçage.

FIGURE 1

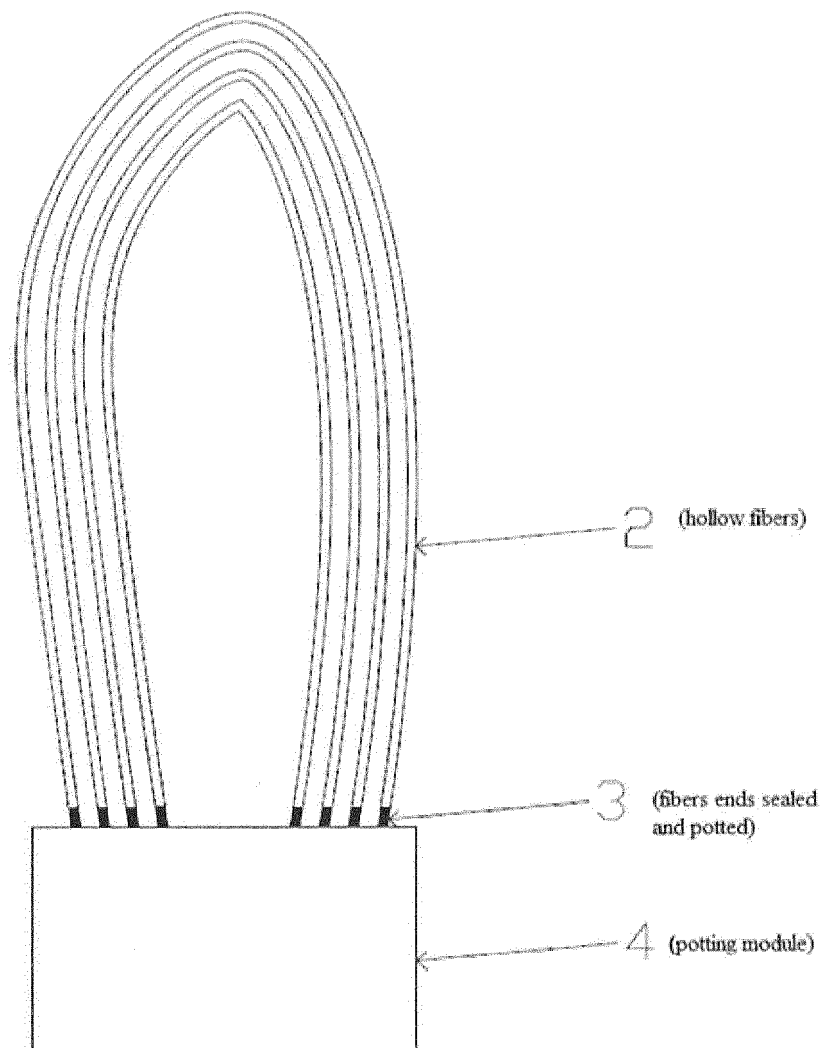


FIGURE 2

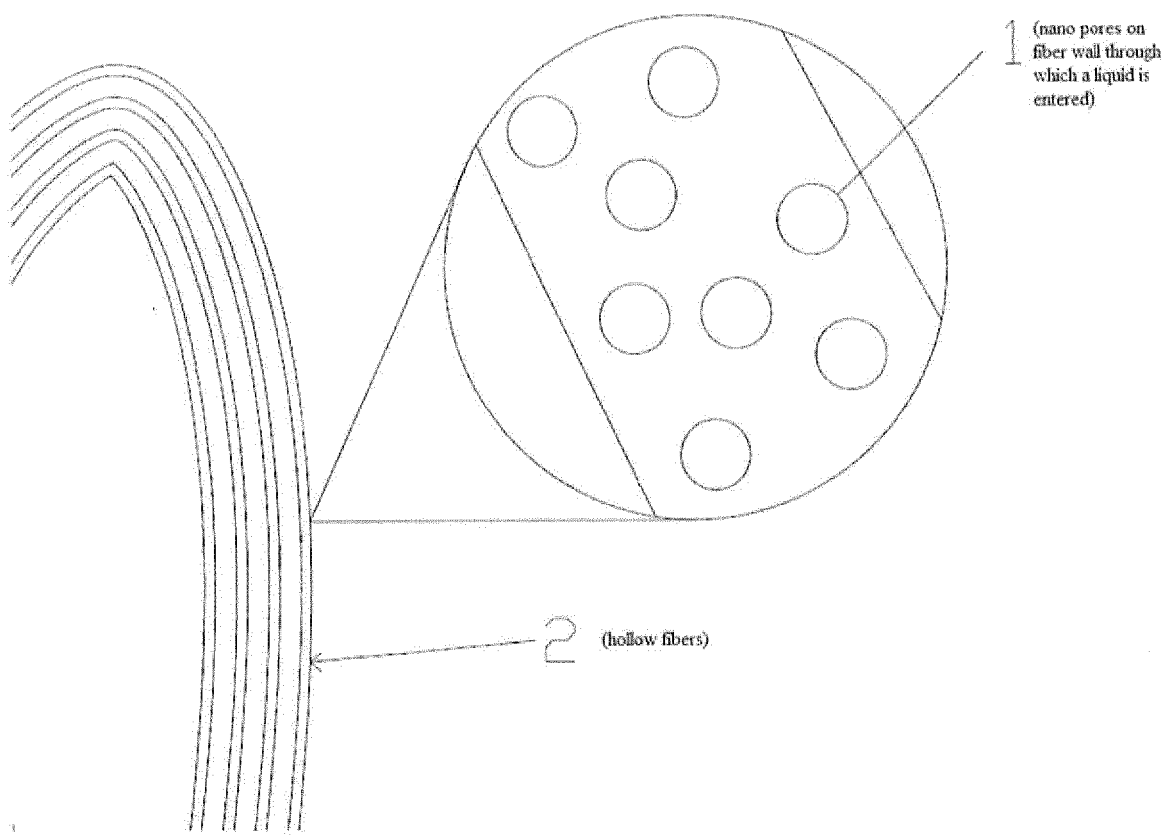


FIGURE 3

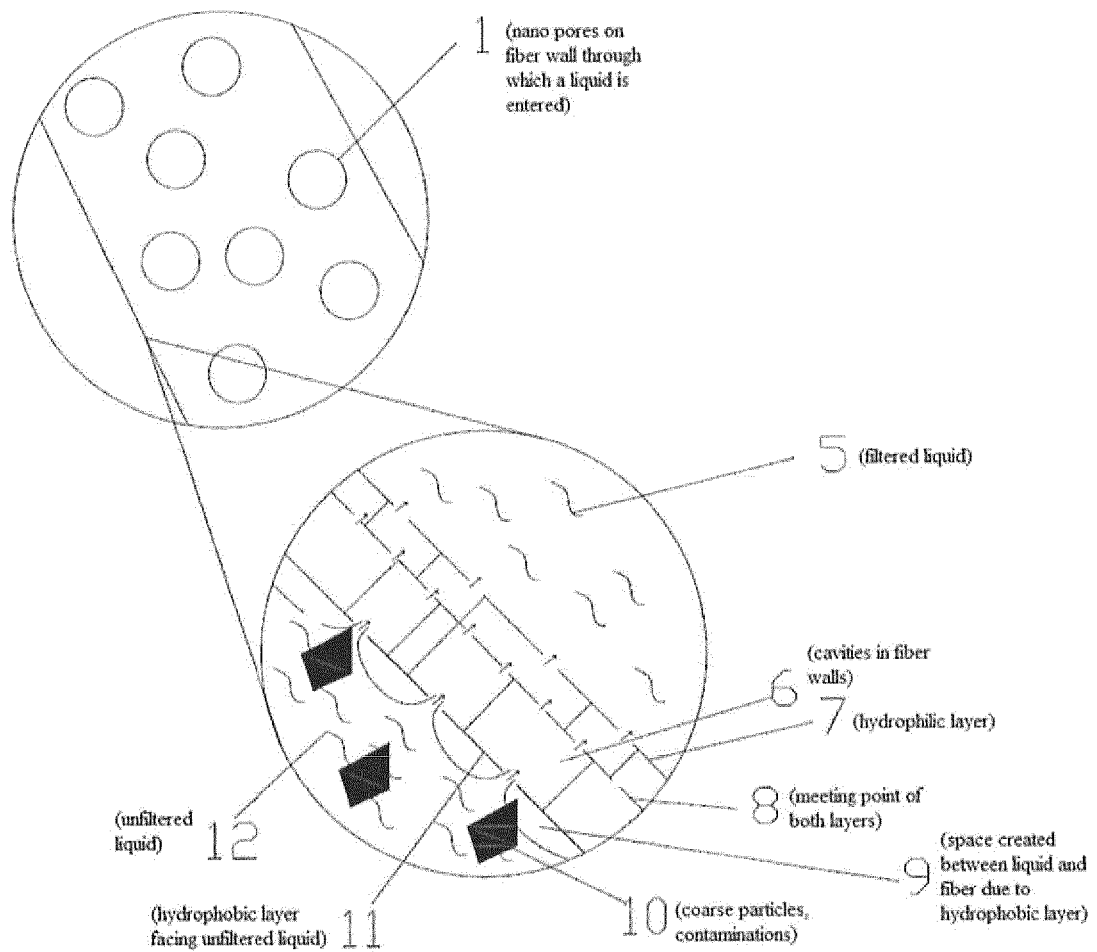


FIGURE 4

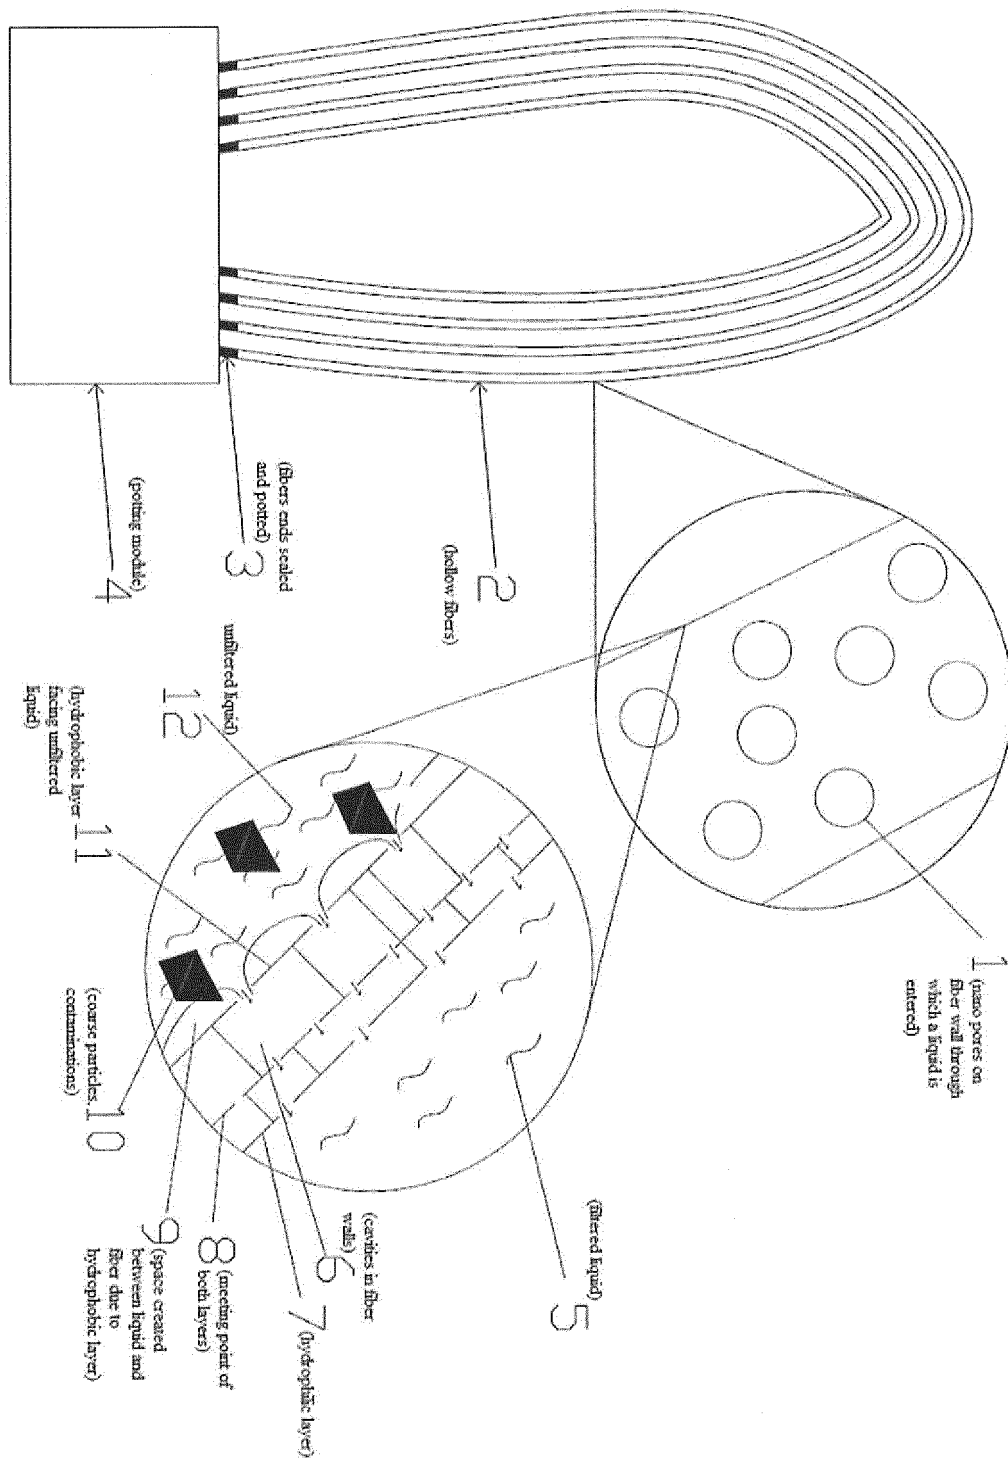


FIGURE 5

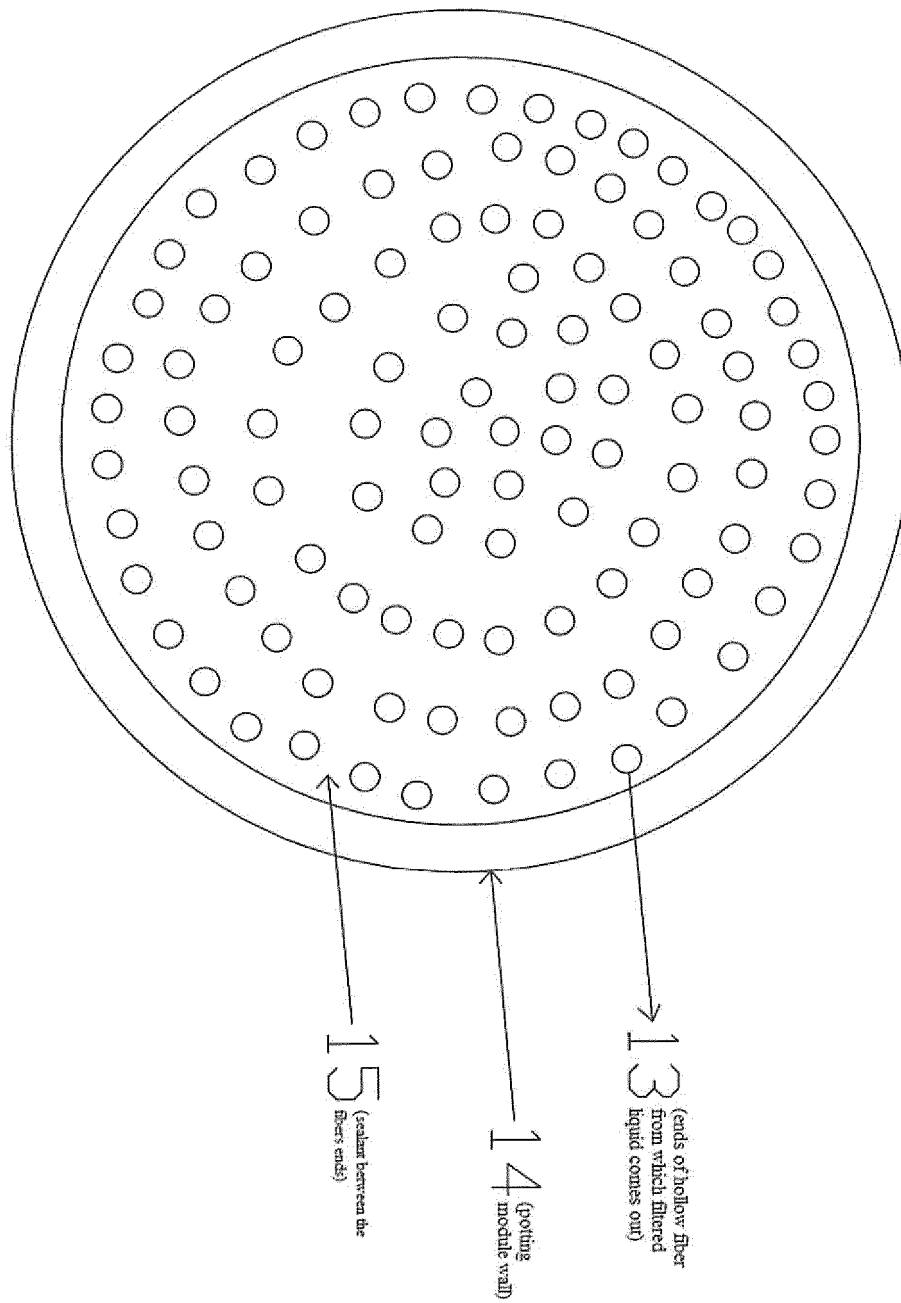


FIGURE 6

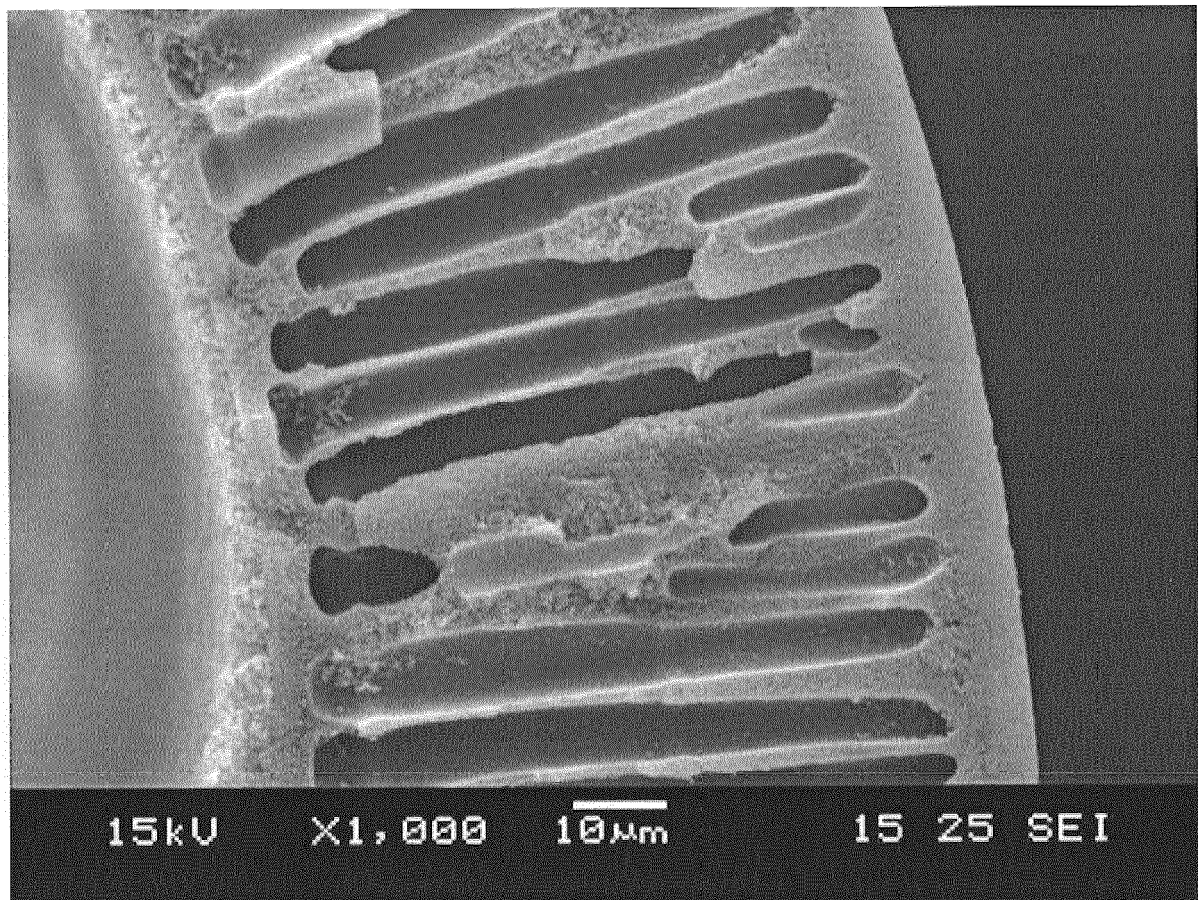


FIGURE 7

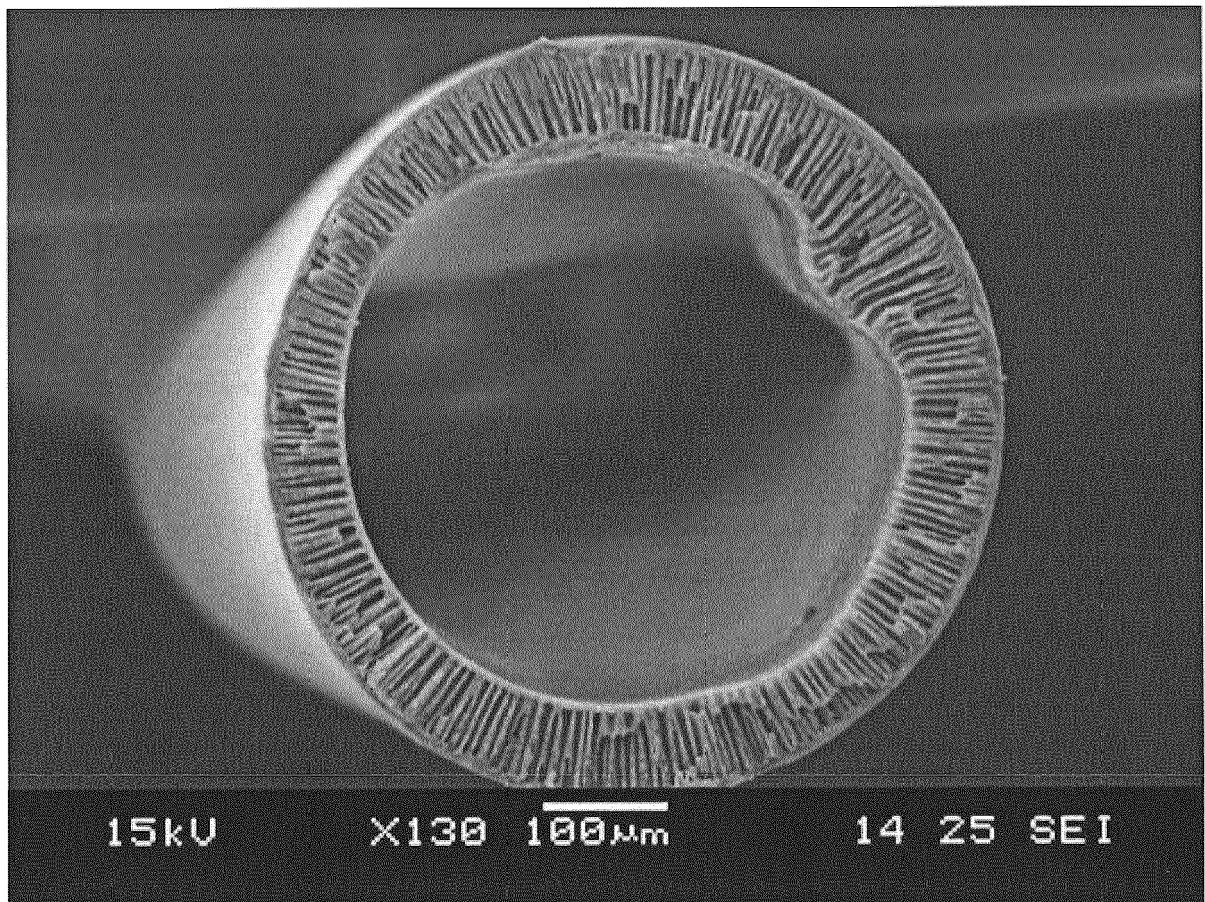


FIGURE 8

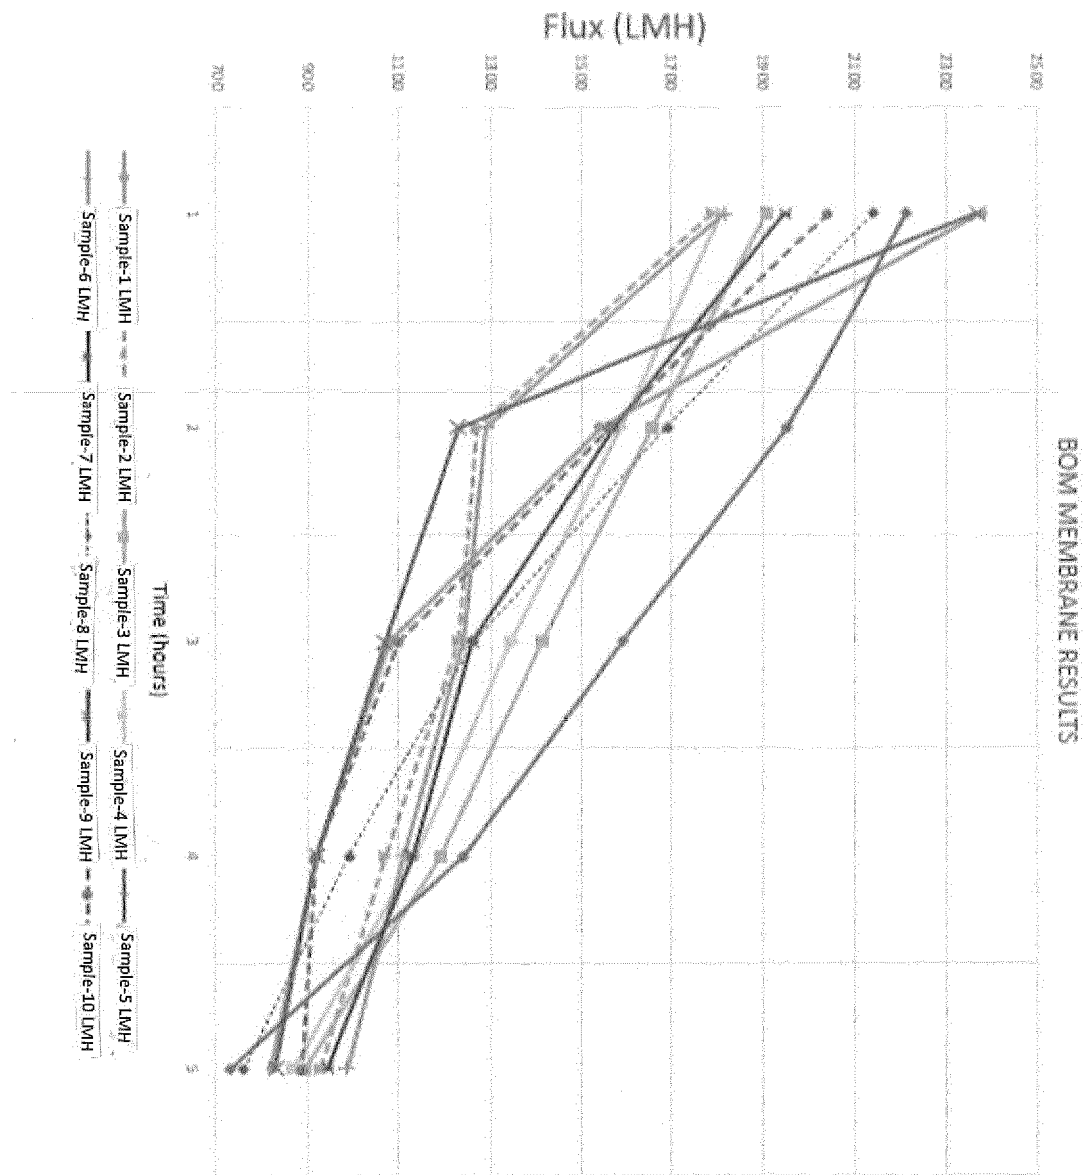


FIGURE 9

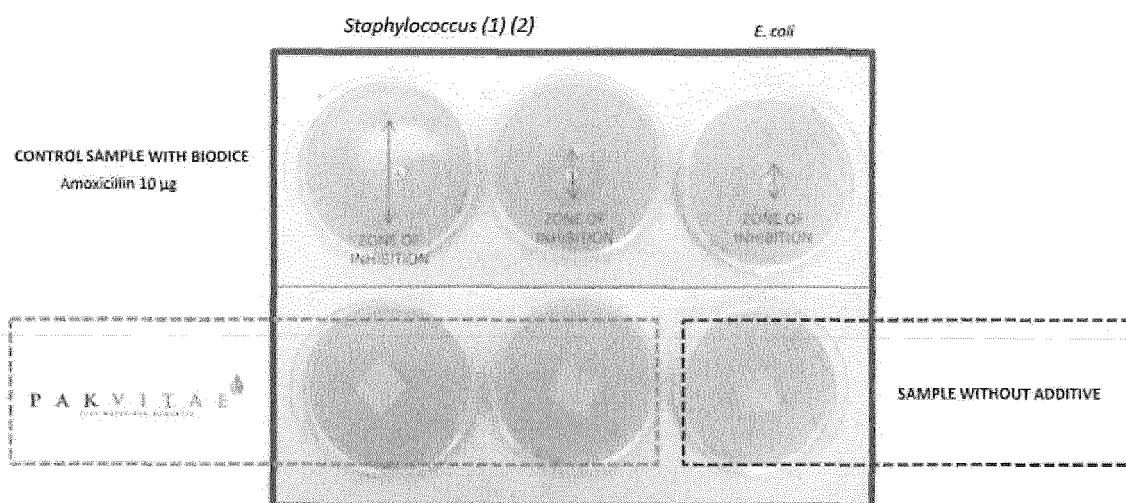


FIGURE 10

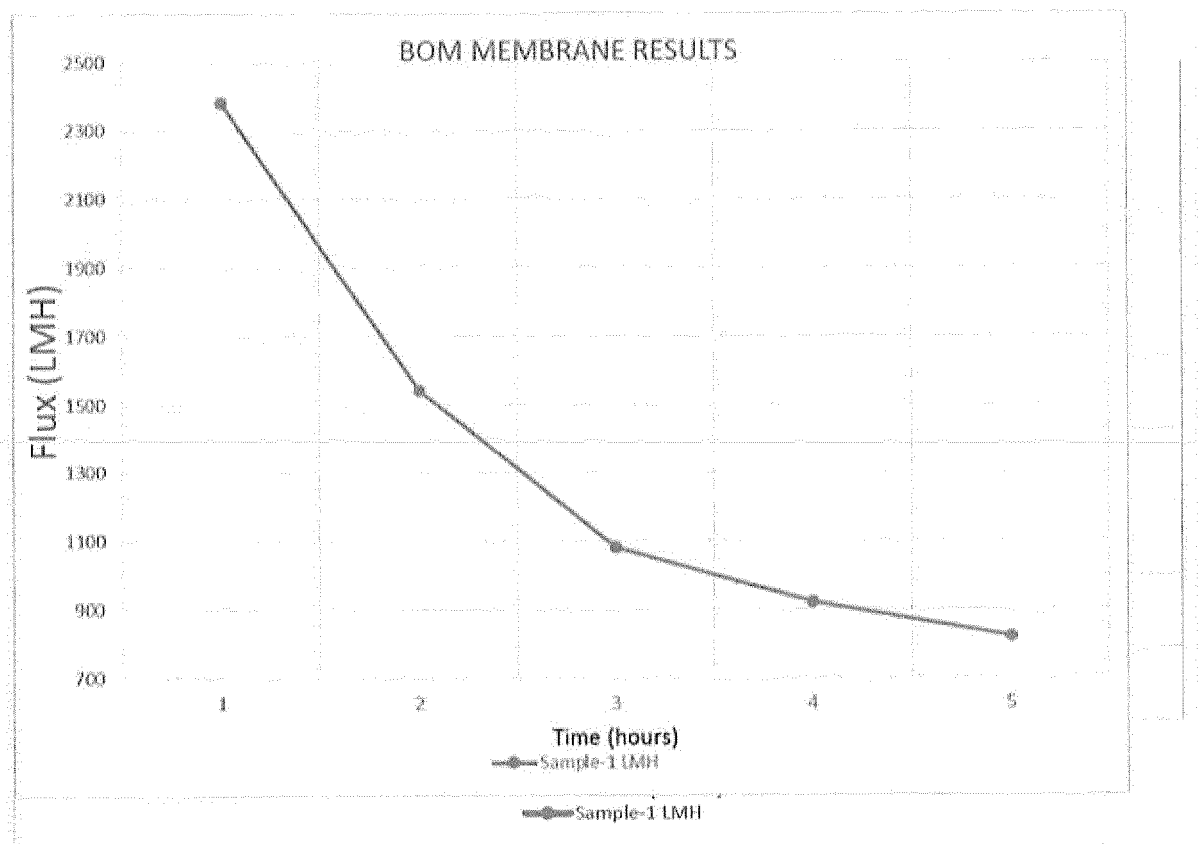


FIGURE 11

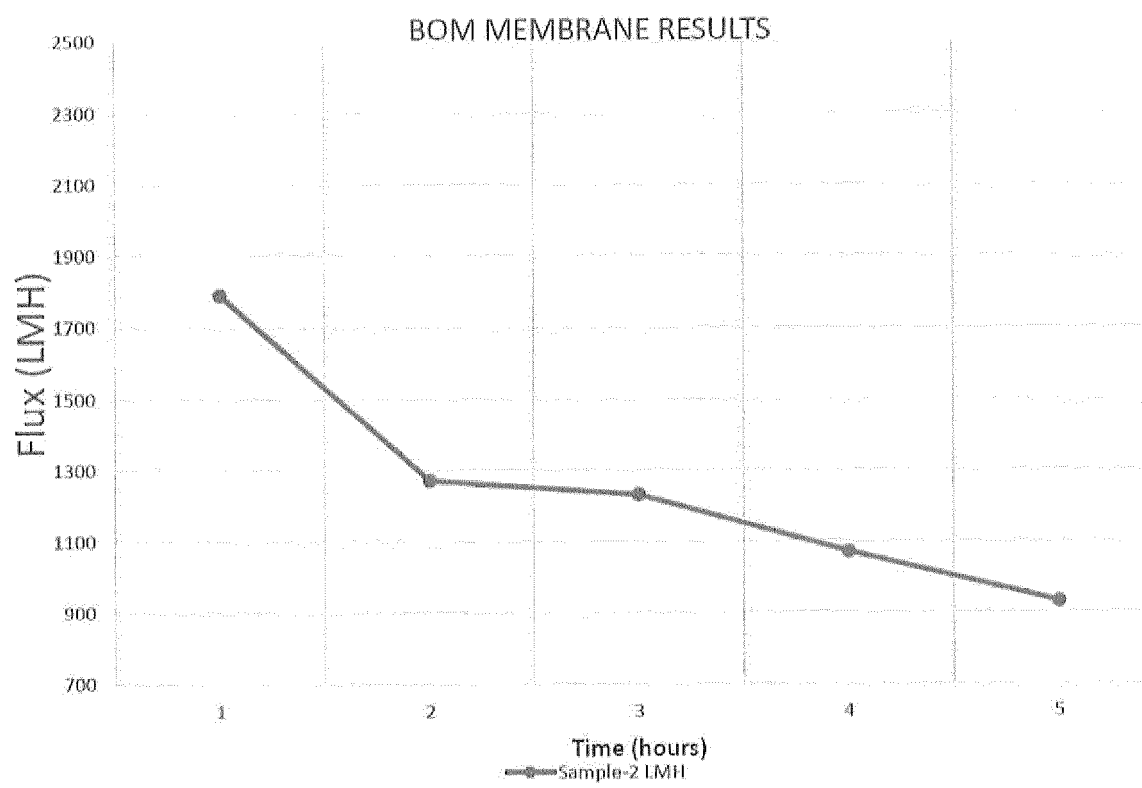


FIGURE 12

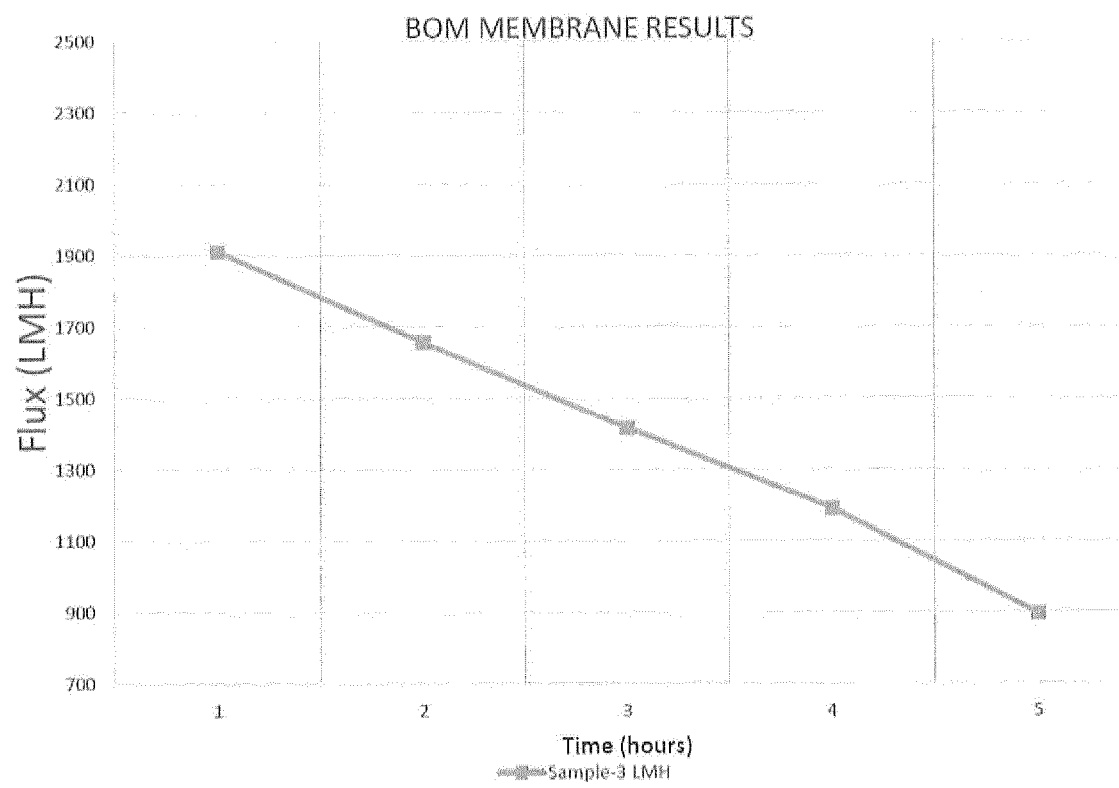


FIGURE 13

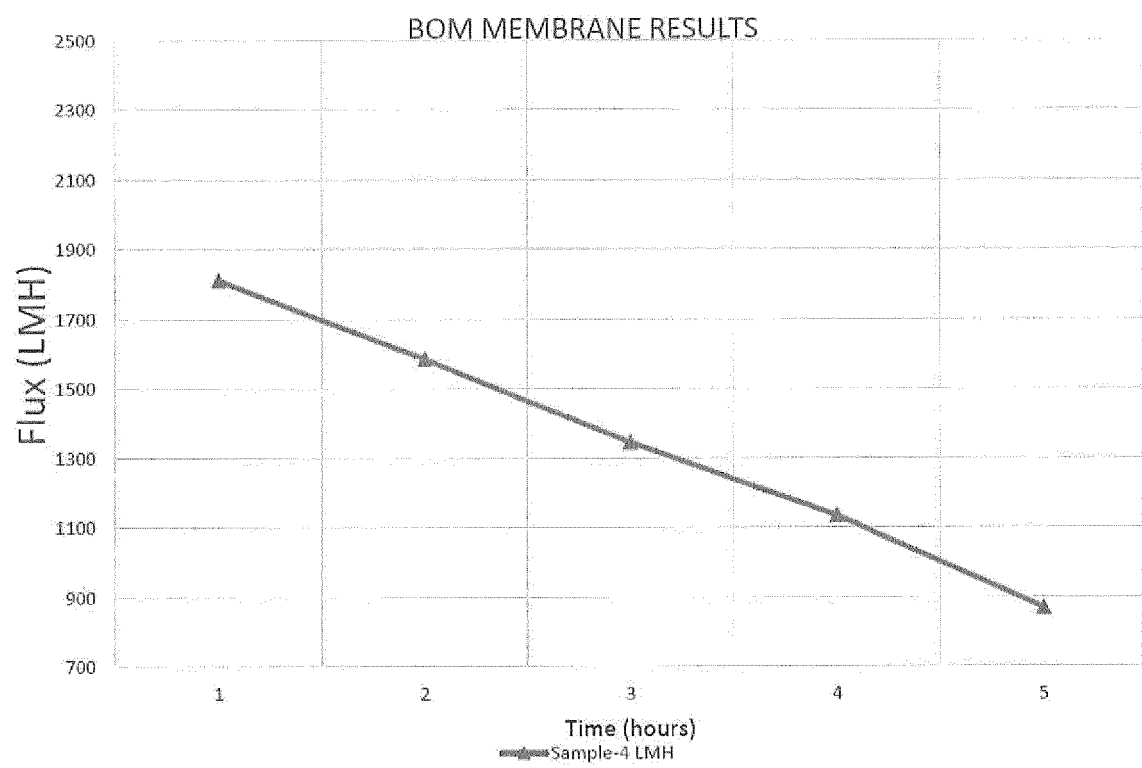


FIGURE 14

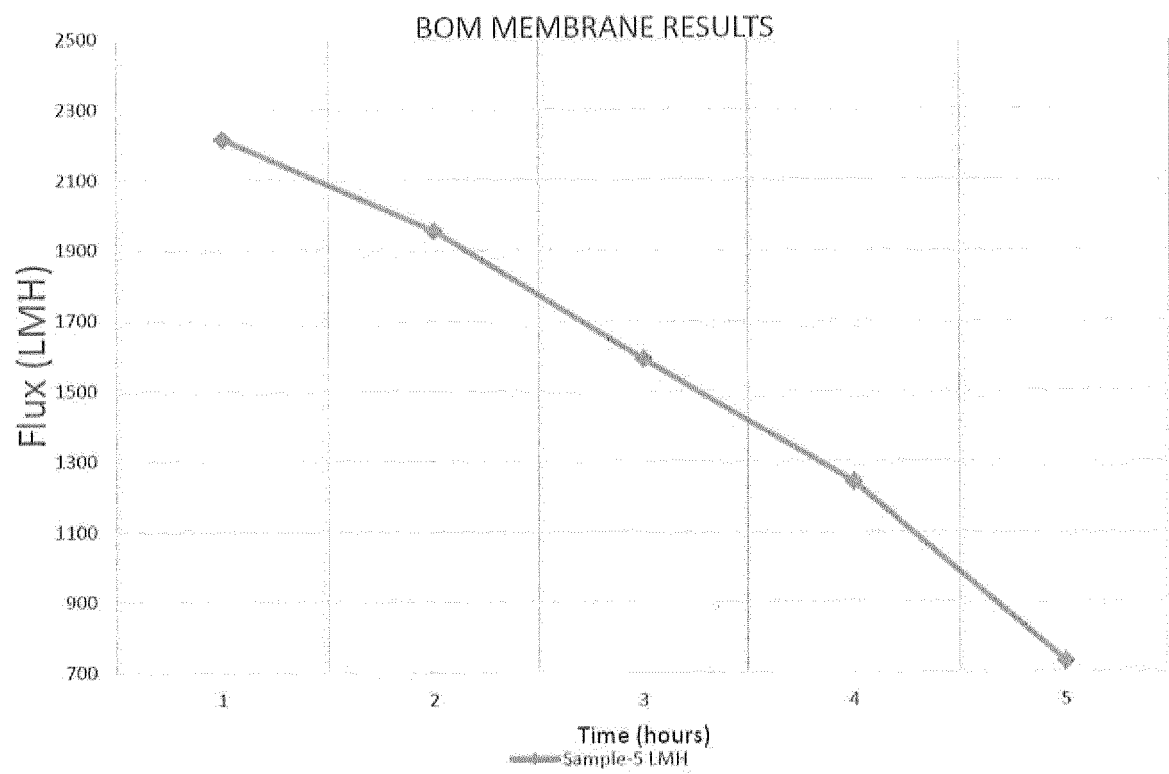


FIGURE 15

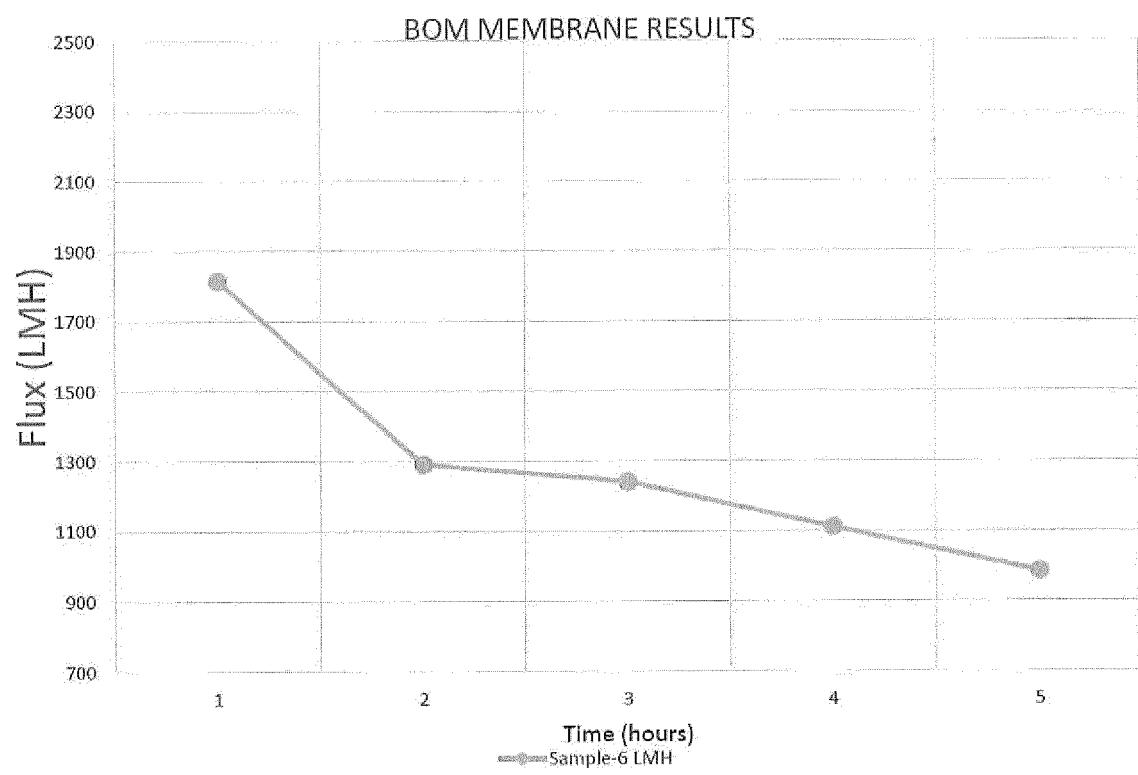


FIGURE 16

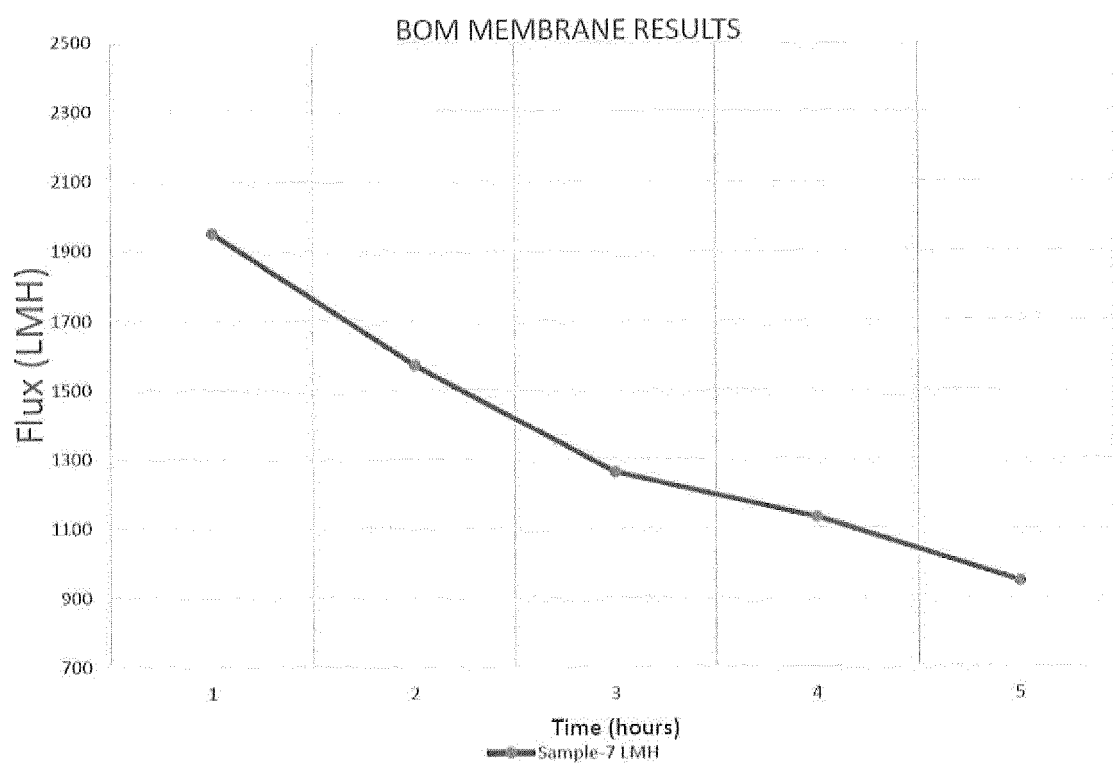


FIGURE 17


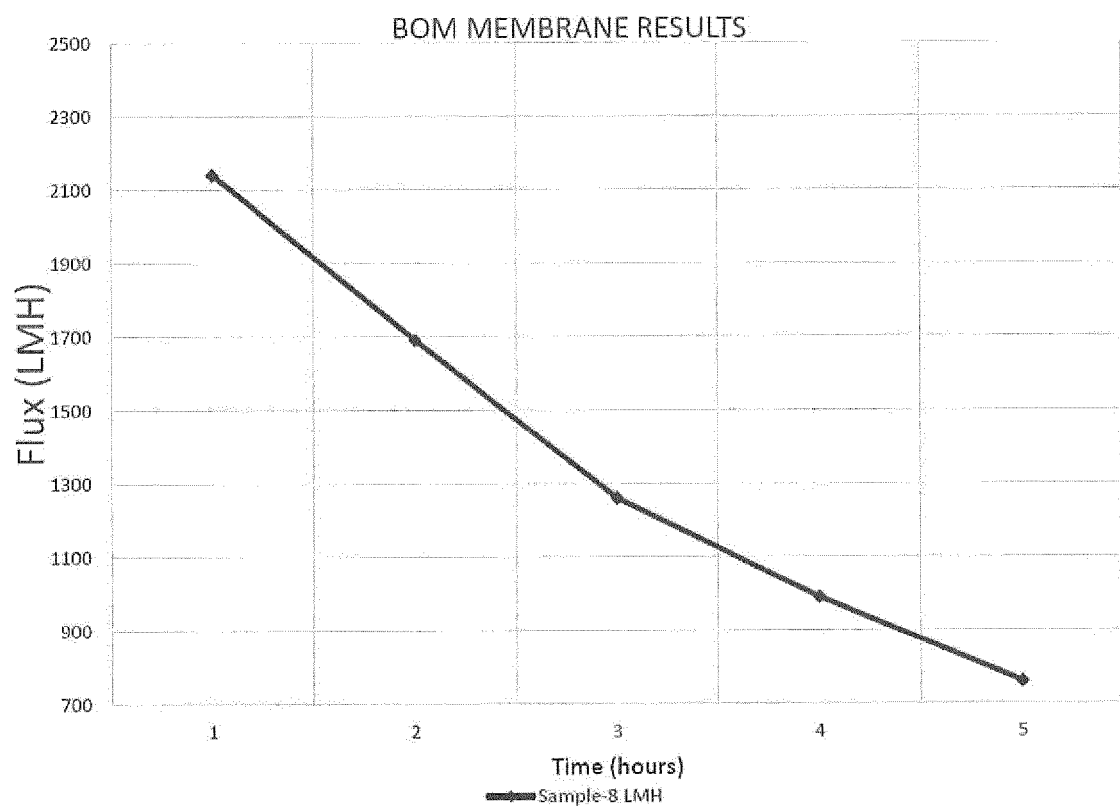


FIGURE 18

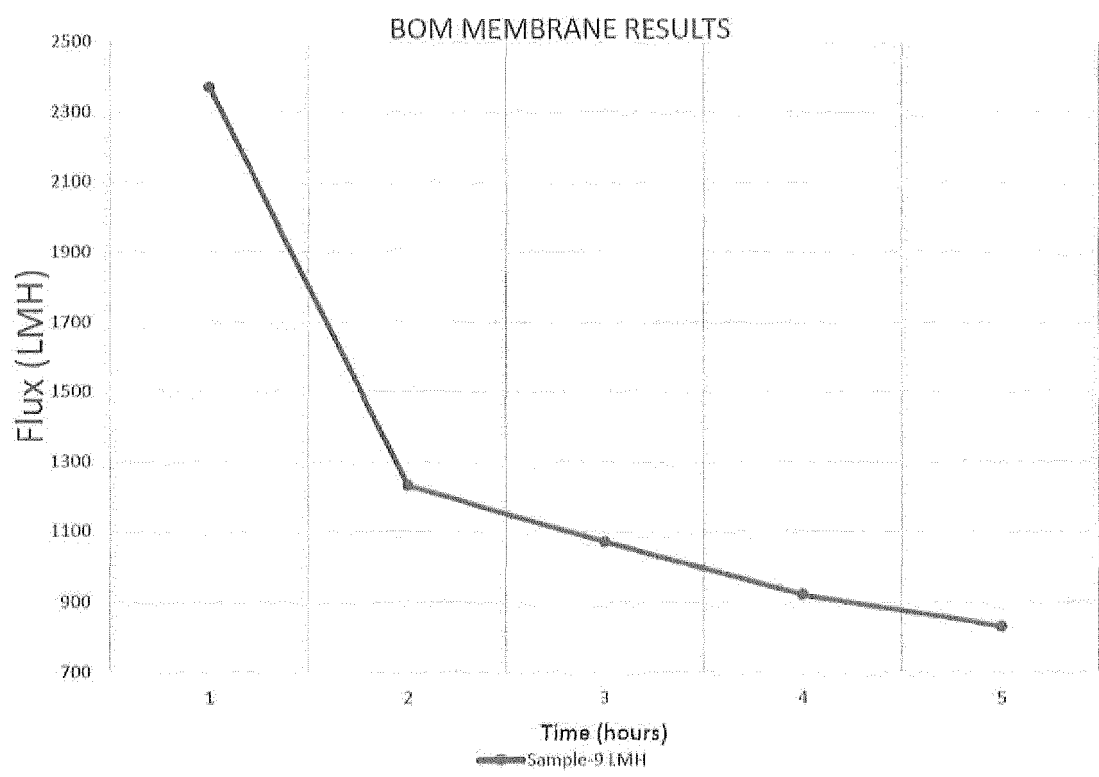

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4435289 A [0013]
- WO 2008101172 A, Vestergaard Frandsen [0014]
- EP 2235502 B1 [0015] [0016] [0018] [0020]
- US 4636307 A [0017]
- EP 0938367 A [0018]
- US 2004078625 A [0019]
- US 8852439 B2 [0020] [0021] [0023]
- US 7390343 B [0024]
- US 9200086 B [0024]
- US 5160673 A [0046]

Non-patent literature cited in the description

- **PERSSON, KENNETH M. ; VASSILIS GEKAS ; GUN TRÄGÅRDH.** Study of membrane compaction and its influence on ultrafiltration water permeability. *Journal of membrane science*, 1995, vol. 100 (2), 155-162 [0093]
- **BACCHIN, PATRICE ; PIERRE AIMAR ; ROBERT W. FIELD.** Critical and sustainable fluxes: theory, experiments, and applications. *Journal of membrane science*, 2006, vol. 281 (1-2), 42-69 [0094]
- **C.S. FENG ; B. SHI ; G. LI ; Y. WU.** Preparation and properties of microporous membrane from polyvinylidene fluoride cotetrafluoroethylene (F2.4) for membrane distillation. *J. Membr. Sci.*, 2004, vol. 237, 15-24 [0095]